

# FOODLUBE®

...the essential link in the food chain

ROCOL®

Performance you can trust

High performance lubricants for the food industry



ISO 21469 Certified

# HISTORY OF EXCELLENCE

**At ROCOL® we manufacture a range of innovative greases, oils, metalworking fluids, lubricants, aerosol paints, anti-slip floor coatings and panels – all designed to exceed today's challenging operating conditions.**

Over the last 130 years, we have expanded considerably and offer solutions to nearly every facet of industry with over 150 distributors stocking and supplying the product range worldwide.

ROCOL has worked with some of the world's leading companies in many diverse industries and applications, developing products with one common goal: to deliver optimum performance.

We pride ourselves on producing technically advanced products with industry needs at the core. Each and every product has been developed in the spirit ROCOL is renowned for:

- ▶ Trusted Superior Performance
- ▶ Problem Solving
- ▶ High Quality
- ▶ Technical Innovation
- ▶ Excellent Technical and After-Sales Support



ROCOL operates to internationally recognised standards for quality, environment and safety. Also, we are proud of our Investor in People accreditation which demonstrates our commitment to the continual engagement and development of our people.

## QUALITY



## ENVIRONMENT



## SAFETY



## PEOPLE



## ASSURANCE



# CONTENTS

## FOOD GRADE PRODUCTS

|                                                 |       |
|-------------------------------------------------|-------|
| ISO 21469                                       | 1     |
| DETEX®                                          | 2     |
| BEARING GREASES                                 | 3-6   |
| CHAIN LUBRICANTS                                | 7-9   |
| GEAR OILS                                       | 10    |
| HYDRAULIC, COMPRESSOR<br>AND VACUUM PUMP OILS   | 11    |
| ANTI-SEIZE & ASSEMBLY PRODUCTS                  | 12    |
| CORROSION PROTECTION                            | 13    |
| INDUSTRIAL CLEANERS                             | 14    |
| MULTI-PURPOSE MAINTENANCE PRODUCTS              | 15-16 |
| SEAMER FLUIDS/ROTARY COOKER                     | 17    |
| PUROL™ 3H LUBRICANTS<br>FOR DIRECT FOOD CONTACT | 18    |
| ROCOLcare®                                      | 19-20 |
| MAINTENANCE LUBRICANTS PRODUCT SELECTOR         | 21-22 |
| SITE SAFETY PRODUCT SELECTOR                    | 23    |
| METAL WORKING PRODUCT SELECTOR                  | 24    |





# ISO 21469

The globally recognised ISO 21469:2006 certification ticks an important box for auditors as it provides credible, independent assurance that all Rocol products are formulated, manufactured and supplied hygienically and safely.



ISO 21469 Certified

For any food and drink manufacturer using FOODLUBE lubricants, especially those reliant on leading retailers through long-term contracts, provides a vital first step towards conforming with major supermarket, European Food Safety Inspection Service and British Retail Consortium audit requirements.

Products in the FOODLUBE range are already NSF-H1 registered, which specifies the hygiene requirements for the formulation, use and handling of lubricants that may incidentally come into contact with products during manufacture.

ISO 21469:2006 builds on the product-specific NSF-H1 standard to represent another important layer of safety approval. It means that products are manufactured to stringent recipe and hygiene standards using good manufacturing practices, dedicated equipment and strict handling procedures. Each product is hygiene assured as it has been independently verified by an NSF inspector and tested in their laboratories. It is then deemed safe for incidental food contact and certified as being manufactured only from FDA listed ingredients which are free from animal derived materials, nut oils, soya, dairy and genetically modified ingredients.





DETEX metal detectable components for aerosols are designed to assist food processing plants in meeting strict HACCP requirements regarding the use of the Rocol® NSF accredited products.

AEROSOL CAP



ACTUATOR



- ▶ All plastic components are metal detectable and capable of detection by most metal detection equipment
- ✓ Reduce concerns of food product contamination and assist with HACCP requirements
- ▶ All metal detectable plastic components are GRAS listed (Generally Regarded As Safe – FDA 21 C.F.R Sections 177 and 178)
- ✓ Meets FDA requirements as acceptable material for use in food processing plants

FOODLUBE®

## FOODLUBE®

**FOODLUBE from Rocol is the lubrication solution of choice in the food industry**

In addition to being NSF H1 Registered for absolute food safety, FOODLUBE helps to improve cleanliness and efficiency while significantly reducing costs and downtime.


Over a decade spent working with leading food companies gives Rocol the experience to offer the best advice on how to deliver these results through implementation of a lubrication management approach that is consistent with current food safety legislation and easily integrated into HACCP processes.

**Today, for our customer, the FOODLUBE brand is synonymous with:**

- Increased overall equipment efficiency
- Full audit compliance
- Training and support
- Peace of mind
- Food safety



### Selection Chart

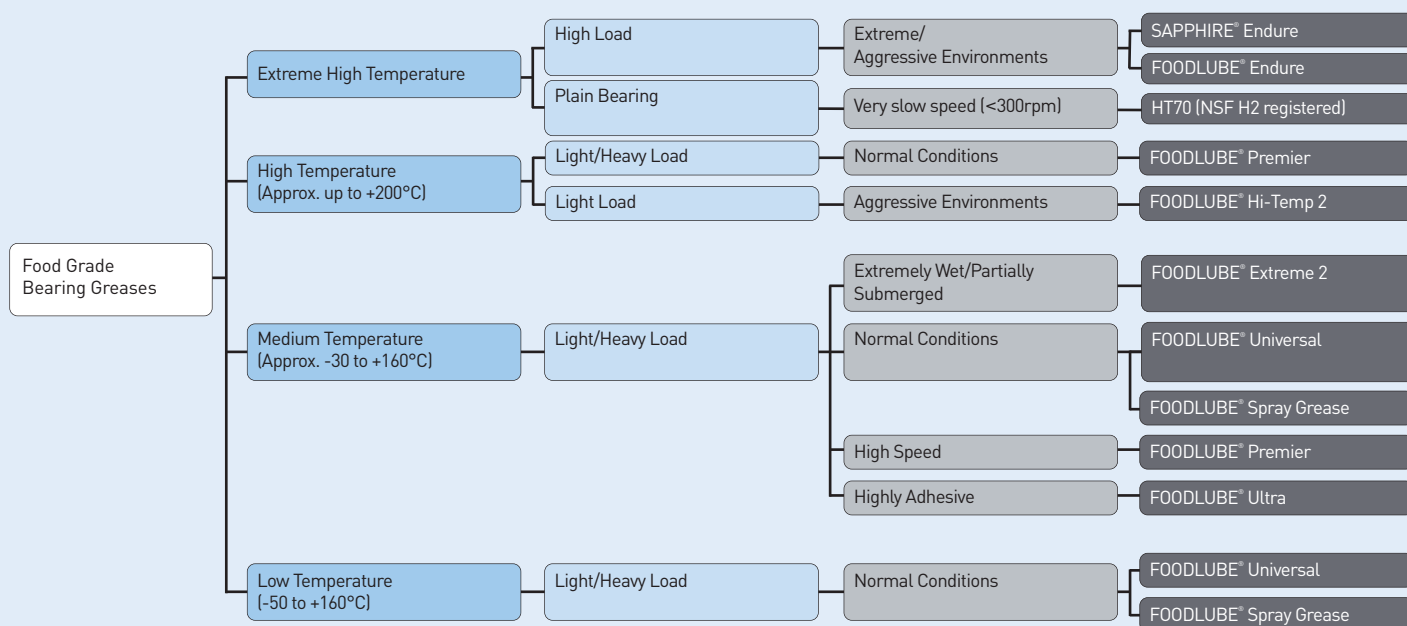

If you require help in selecting a product, **contact Rocol® direct: +44 (0) 113 232 2600**



## FOODLUBE® Universal 2, 0, 000

High performance, multi-purpose, food grade grease for maximum bearing life

A truly universal, extreme pressure grease, fortified with PTFE, designed for the enhanced lubrication of all types of ball, roller and plain bearings.

- ▶ Significantly extends bearing life
- ▶ Superior load and wear properties
- ▶ Highly resistant to water washout
- ▶ Excellent corrosion protection
- ▶ Wide temperature range -50°C to +160°C
- ▶ Also available as an aerosol
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Description | Part Code | Size |
|-------------|-----------|------|
| NLGI 2      | 15231     | 380g |
|             | 15236     | 4kg  |
|             | 15234     | 18kg |
| NLGI 0      | 15276     | 4kg  |
|             | 15274     | 18kg |
| NLGI 000    | 15286     | 4kg  |
|             | 15284     | 18kg |



## FOODLUBE® Premier 1

Food grade grease for bearings operating at high speeds and temperatures

A high performance EP grease, fortified with PTFE, designed for enhanced lubrication, particularly high speed and temperature applications.

- ▶ Ideal for electric motors and fan bearings
- ▶ Significantly extends bearing life
- ▶ High load and wear properties
- ▶ Highly resistant to water washout
- ▶ Excellent corrosion protection
- ▶ Wide temperature range -30°C to +180°C
- ▶ NSF H1 Registered
- ▶ ISO21469 Certified

| Description | Part Code | Size |
|-------------|-----------|------|
| NLGI 1      | 15291     | 380g |
|             | 15296     | 4kg  |
|             | 15294     | 18kg |



## SAPPHIRE® Endure

Premium extreme temperature and chemical resistant grease.

Extreme performance perfluorinated polyether EP grease fortified with PTFE. Designed to operate where conventional greases fail due to chemical contamination or attack.

- ▶ Extreme chemical and solvent resistance
- ▶ Resists caustic wash down
- ▶ Greatly extends lubrication intervals
- ▶ Excellent load carrying and anti-wear properties
- ▶ Extremely stable at high temperatures
- ▶ Approved by Rolls Royce for use on Harrier Pegasus Thrust Nozzle Drive Mechanism
- ▶ Also approved for Submarine Clearance
- ▶ Temperature range of -25°C to +280°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Description | Part Code | Size |
|-------------|-----------|------|
| NLGI 2      | 12330     | 100g |
|             | 12331     | 700g |
|             | 12334     | 1kg  |
|             | 12336     | 5kg  |
|             | 12337     | 18kg |



## FOODLUBE® Hi-Temp 2

### High temperature food grade grease

A silicone grease fortified with PTFE, suitable for high temperature applications. Designed for the lubrication of all types of slower bearings and sliding surfaces.

- ▶ Good anti-wear properties
- ▶ Highly resistant to wash off
- ▶ Ideal for rubbers and plastics
- ▶ Opaque appearance
- ▶ Good chemical resistance
- ▶ Temperature range -20°C to +200°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Description | Part Code | Size |
|-------------|-----------|------|
| NLGI 2      | 15251     | 380g |
|             | 15256     | 4kg  |
|             | 15254     | 18kg |



## FOODLUBE® Endure 00

### Premium, food grade lubricant for extreme temperatures

Extreme performance semi-fluid perfluorinated polyether extreme pressure grease fortified with PTFE.

- ▶ Extremely stable at high temperatures
- ▶ Greatly extends lubrication intervals
- ▶ Excellent chemical and solvent resistance
- ▶ Excellent high load and anti-wear properties
- ▶ Wide temperature range of -25°C to +280°C
- ▶ Ideal for bakery oven chains
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size |
|-----------|------|
| 15503     | 525g |



## FOODLUBE® Spray Grease

### Food grade, multi-purpose, extreme pressure grease fortified with PTFE in aerosol

FOODLUBE Spray Grease is FOODLUBE Universal 2 in an aerosol can for convenient application. It is a white, non-toxic lubricant designed for the effective lubrication and protection of ball, roller and plain bearings, slides, pins, linkages and bushes operating in food, pharmaceutical and other clean environments.

- ▶ Offers an excellent wide temperature resistance of -50°C to +160°C
- ▶ Highly resistant to water wash-off and offers excellent corrosion protection
- ▶ Excellent oxidation stability resulting in extended relubrication intervals and a reduction in lubricant usage
- ▶ Excellent all round, long life lubricant fortified with PTFE for improved lubricity and performance
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 15030     | 400ml |



## FOODLUBE® Extreme

### Food grade grease for extremely wet applications

A highly tenacious extreme pressure bearing grease with superior performance in wet conditions, for the lubrication of all types of ball, roller and plain bearings.

- ▶ Superior water resistance
- ▶ Excellent corrosion protection
- ▶ High load and wear properties
- ▶ Significantly extends bearing life
- ▶ Temperature range -30°C to +160°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Description | Part Code | Size |
|-------------|-----------|------|
| NLGI 2      | 15241     | 380g |
|             | 15246     | 4kg  |
|             | 15244     | 18kg |





## FOODLUBE® Ultra

**A highly adhesive food grade grease for plain bearings and sliding surfaces**

Adhesive, multipurpose extreme pressure grease. Designed for the effective lubrication of slides, cams, gears and plain bearings.

- ▶ Extremely durable long life grease film
- ▶ Does not drip or fling off
- ▶ Highly resistant to water wash off
- ▶ Excellent corrosion protection
- ▶ High load and wear properties
- ▶ Temperature range -15°C to +160°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Description | Part Code | Size |
|-------------|-----------|------|
| NLGI 2/3    | 15811     | 380g |
|             | 15816     | 4kg  |
|             | 15814     | 18kg |



## FOODLUBE® Auto SF

**A highly adhesive food grade grease for plain bearings and sliding surfaces**

Designed specifically for automatic lubrication systems, where long pipe runs and small bore piping cause blockage or delivery issues. Formulated to deliver all of the benefits expected from ROCOL long life greases with the added benefit of pump-ability.

- ▶ Extremely durable long life grease film
- ▶ Does not drip or fling off
- ▶ Highly resistant to water wash off
- ▶ Excellent corrosion protection
- ▶ High load and wear properties
- ▶ Temperature range -15°C to +160°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 15912     | 4kg   |
| 15913     | 18kg  |
| 15914     | 160kg |



## FOODLUBE® Autolube Complete & Refill

**Food grade, electromechanical grease dispenser for trouble free lubrication**

Electromechanical, fully automatic lubrication system containing FOODLUBE Premier 1. Delivers exact quantities of grease, over varied time periods, to all types of ball, roller and plain bearings.

- ▶ Selectable 1,3,6, or 12 month dispensing periods
- ▶ Easy to install and maintain
- ▶ Ideal for non-accessible areas
- ▶ Grease temperature range -50°C to +160°C
- ▶ Autolube dispenser temperature range 0°C to +50°C
- ▶ NSF H1 Registered

| Part Code | Size  |
|-----------|-------|
| 15220     | 120ml |
| 15224     | 120ml |



## FOODLUBE® UNILUBE

**Food grade, multipurpose, extreme pressure (EP) grease with PTFE in an automatic lubricator**

A gas activated lubricant dispenser filled with FOODLUBE Premier 1 grease. Provides consistent and constant lubrication of all types of ball, roller and plain bearings.

- ▶ 120ml capacity
- ▶ Compact design enabling application in hard to reach places
- ▶ Transparent housing making it easier to monitor lubricant levels
- ▶ Variable from 1 – 12 monthly increments
- ▶ Fully automatic
- ▶ Easy to install and maintenance free
- ▶ Grease temperature range -30°C to +180°C
- ▶ UNILUBE temperature range -20°C to +55°C
- ▶ NSF H1 Registered

| Part Code | Size  |
|-----------|-------|
| 13010     | 120ml |



## HT70

**Extremely high temperature bearing grease for slow speeds**

A unique molybdenum disulphide grease for slow moving, high temperature bearing applications.


- ▶ Ideal for rotary rack oven bottom bearings
- ▶ Designed for slow speed applications typically < 300rpm
- ▶ Extremely slow evaporation at elevated temperatures
- ▶ Minimal deposit formation against conventional lubricants
- ▶ Molybdenum disulphide provides emergency lubrication
- ▶ Wide temperature range: +180°C to + 300°C
- ▶ NSF H2 Registered

| Part Code | Size |
|-----------|------|
| 12106     | 4kg  |



A comprehensive range of products designed to lubricate and protect chains operating in the food and clean industries. Whatever the type of drive or conveyor chain in use, ROCOL can provide a lubricant to ensure trouble free operation – cutting expensive downtime and increasing productivity.

## Selection Chart

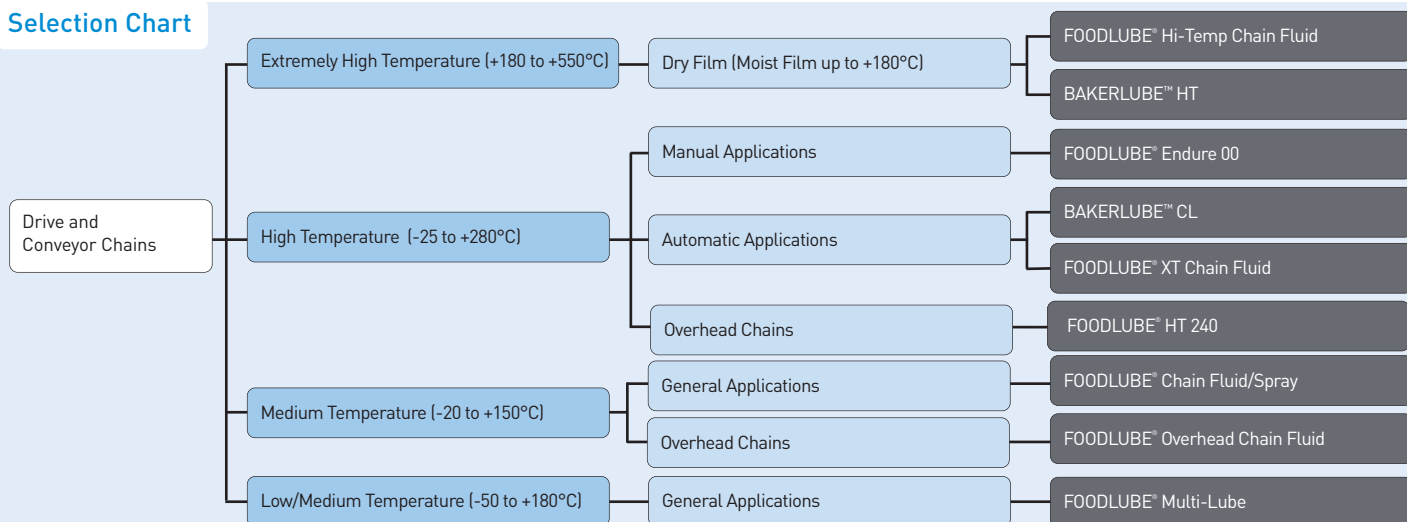

## FOODLUBE® Chain Fluid

**Tenacious, food grade lubricant for extended chain life**

Versatile, high performance, chain lubricant suitable for all types of drive and conveyor chains

- ▶ Excellent penetration properties
- ▶ Tenacious low drip formulation
- ▶ Outstanding corrosion protection
- ▶ Good load carrying capacity
- ▶ Good resistance to water wash off
- ▶ Temperature range -20°C to +150°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size |
|-----------|------|
| 15506     | 5L   |
| 15505     | 20L  |



## FOODLUBE® Chain Spray

**Tenacious, food grade spray lubricant for extended chain life**

Convenient aerosol chain lubricant. Ideal for lubrication of all types of drive and conveyor chains.

- ▶ Outstanding penetration properties
- ▶ Highly resistant to water wash off
- ▶ Good water displacing properties
- ▶ Tenacious low drip formulation
- ▶ Good load carrying capacity
- ▶ Temperature range -20°C to +150°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 15610     | 400ml |



## FOODLUBE® XT Chain Fluid

**Formulated from a combination of synthetic esters and a special antioxidant package**

Ensures the highest performance in terms of thermal stability, low evaporation loss and minimal deposit formation

- ▶ Excellent penetration properties
- ▶ Low evaporation rates – low fuming and longer wet film life
- ▶ Low deposit and varnish formation
- ▶ Excellent anti wear properties
- ▶ Temperature range -0°C to +280°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size |
|-----------|------|
| 15800     | 20L  |
| 15801     | 200L |



## FOODLUBE® Chain Fluid UNILUBE

**Highly adhesive, food grade lubricant for overhead chains**

Specifically formulated to reduce contamination issues on all drive and conveyor chains - particularly for the meat processing industry.

- ▶ Extremely tenacious film
- ▶ No drip formulation
- ▶ Excellent corrosion protection
- ▶ Good water wash off properties
- ▶ Grease temperature range -20°C to +150°C
- ▶ Autolube dispenser temperature range 0°C to +50°C
- ▶ NSF H1 Registered

| Part Code | Size  |
|-----------|-------|
| 15502     | 120ml |



## FOODLUBE® Overhead Chain Fluid

**Highly adhesive, food grade lubricant for overhead chains**

Specifically formulated to reduce contamination issues on all drive and conveyor chains - particularly for the meat processing industry.

- ▶ Extremely tenacious film
- ▶ No drip formulation
- ▶ Excellent corrosion protection
- ▶ Good water wash off properties
- ▶ Temperature range -20°C to +150°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size |
|-----------|------|
| 15786     | 5L   |
| 15785     | 20L  |




## FOODLUBE® HT 240

**Long lasting, high temperature, food grade chain lubricant**

Non-toxic, water resistant lubricant designed primarily for the effective lubrication of all types of high temperature chains & conveyors operating in food, pharmaceutical and other clean environments.

- ▶ Excellent high temperature resistance up to +240°C
- ▶ Good penetration and load carrying properties ensuring that the product lubricates and protects inside rollers, links, pins etc
- ▶ Highly adhesive providing excellent water wash-off resistance and corrosion protection
- ▶ Extremely low evaporation rate resulting in a long wet life at high temperatures for maximum lubricant economy
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size |
|-----------|------|
| 16765     | 20L  |

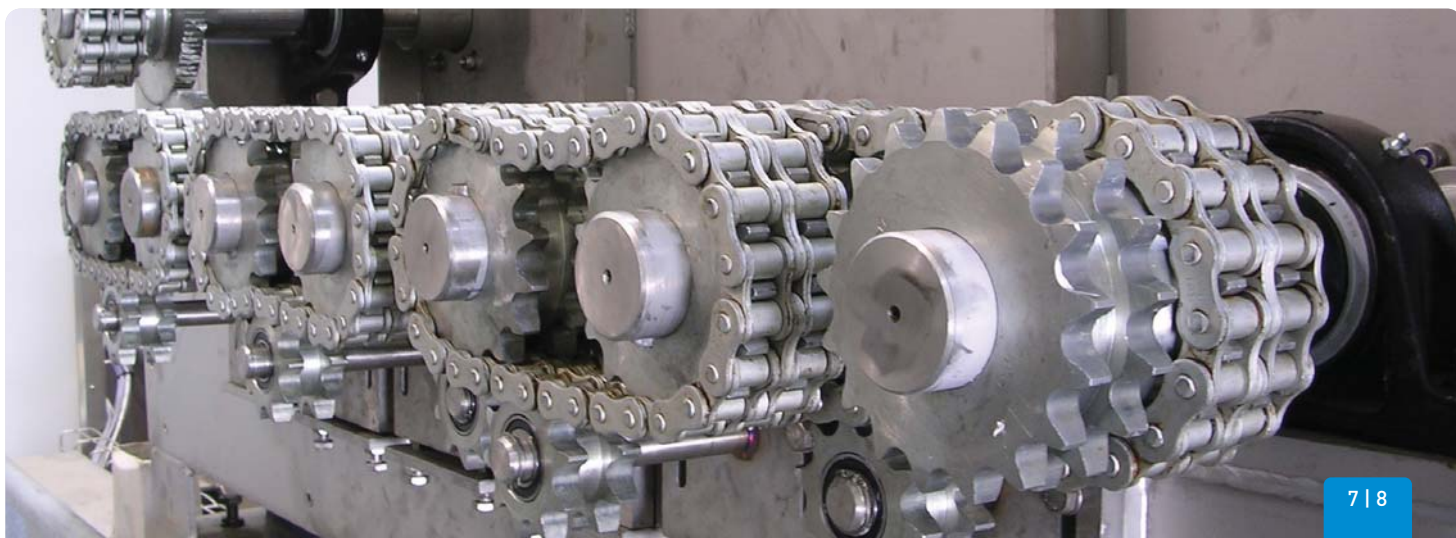



## BAKERLUBE™ HT

High temperature, graphited, synthetic lubricant for bakery oven chains

Extreme high temperature graphited chain lubricant for bakery oven chains.

- ▶ High load carrying performance
- ▶ Clean evaporating base oil
- ▶ For temperatures where conventional fluids fail
- ▶ Does not contain solvents
- ▶ Temperature range; wet film -10°C to +180°C
- ▶ Temperature range; dry film up to +550°C
- ▶ NSF H2 Registered

| Part Code | Size |
|-----------|------|
| 15705     | 20L  |



## BAKERLUBE™ CL

High temperature, synthetic lubricant for bakery oven chains

High temperature, long life, extreme pressure chain and conveyor lubricant.

- ▶ Outstanding resistance to oxidation
- ▶ Solvent free formulation
- ▶ Excellent penetration
- ▶ Clean, residue free film
- ▶ Suitable for automatic lubricators
- ▶ Temperature range 0°C to +280°C
- ▶ NSF H2 Registered

| Part Code | Size |
|-----------|------|
| 15605     | 20L  |



## BAKERLUBE™ WG

High temperature, water based, graphited chain and conveyor lubricant

BAKERLUBE WG is a water based, graphited, high temperature dry film chain lubricant. It is specifically formulated for the lubrication of oven chains subjected to extreme temperatures of up to +550°C. Ideal for the lubrication of conveyor chains in high temperature environments where the risk of contamination by a wet lubricant cannot be tolerated.


- ▶ Fume free
- ▶ Excellent penetration and performance
- ▶ Does not attract dirt or dust
- ▶ Good corrosion protection
- ▶ Excellent extreme pressure (EP) and anti-wear properties
- ▶ Temperature range of +10°C to +80°C
- ▶ Dry film lubrication up to +600°C
- ▶ NSF H2 Registered

| Part Code | Size |
|-----------|------|
| 15805     | 20L  |



ROCOL manufacture a comprehensive range of gear, compressor and hydraulic oils which are designed to provide extended service life, thereby reducing maintenance time and costs.

## Selection Chart

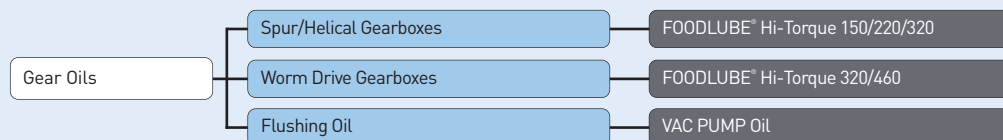


If you require help in selecting a product, **contact ROCOL® direct: +44 (0) 113 232 2600**

## FOODLUBE® Hi-Torque

**Food grade gear oil with start up protection system**

High performance fully synthetic gear oils incorporating start up protection system (SUPS) and anti wear additives to provide maximum lubrication and protection in all types of gearboxes.

- ▶ SUPS – A unique protection for gear teeth on start up and in use
- ▶ Outstanding load carrying performance: FZG load stage 12
- ▶ Excellent anti-wear performance - no need for additional additive treatments
- ▶ Temperature range -20°C to +150°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

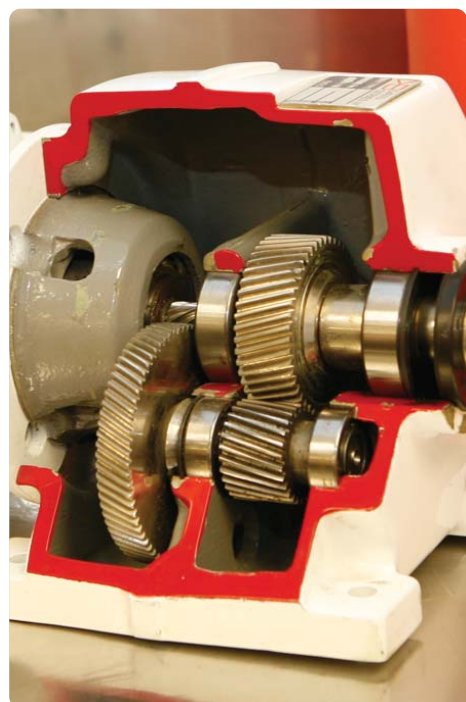

| Description   | Part Code | Size |
|---------------|-----------|------|
| Hi-Torque 150 | 15426     | 5L   |
|               | 15425     | 20L  |
|               | 15429     | 200L |



| Description   | Part Code | Size |
|---------------|-----------|------|
| Hi-Torque 220 | 15526     | 5L   |
|               | 15525     | 20L  |
|               | 15529     | 200L |



| Description   | Part Code | Size |
|---------------|-----------|------|
| Hi-Torque 320 | 15766     | 5L   |
|               | 15765     | 20L  |
|               | 15769     | 200L |




| Description   | Part Code | Size |
|---------------|-----------|------|
| Hi-Torque 460 | 15776     | 5L   |
|               | 15775     | 20L  |
|               | 15779     | 200L |



# FOOD GRADE HYDRAULIC, COMPRESSOR AND VACUUM PUMP OILS



COMPRESSOR AND  
HYDRAULIC OIL



## FOODLUBE® Hi-Power Fluids

High performance, food grade oils for compressor, hydraulics and airline systems

High performance, fully synthetic oils incorporating an optimum blend of high performance additives. Suitable for use in hydraulics, air compressors and airline systems.

- ▶ Unique L-CO system, reduces carry over
- ▶ Enhanced oxidation stability
- ▶ Extremely low sludge and varnish build up
- ▶ Minimal foaming
- ▶ Temperature range -20°C to +100°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified



| Description  | Part Code | Size |
|--------------|-----------|------|
| Hi-Power 22  | 15796     | 5L   |
|              | 15795     | 20L  |
|              | 15799     | 200L |
| Hi-Power 32  | 15896     | 5L   |
|              | 15895     | 20L  |
|              | 15899     | 200L |
| Hi-Power 46  | 15996     | 5L   |
|              | 15995     | 20L  |
|              | 15999     | 200L |
| Hi-Power 68  | 16006     | 5L   |
|              | 16005     | 20L  |
|              | 16009     | 200L |
| Hi-Power 100 | 15946     | 5L   |
|              | 15945     | 20L  |
|              | 15949     | 200L |

## VAC PUMP OIL

Food grade lubricant for extended vacuum pump life

High performance lubricating fluid for use in all vac pumps.

- ▶ Extended life
- ▶ Suitable for high load and high pressure conditions
- ▶ Clean and low odour
- ▶ Low deposit formation
- ▶ Prevents corrosion from moisture ingress
- ▶ Ideal for use as gear box flushing oil
- ▶ Temperature range -5°C to +130°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size |
|-----------|------|
| 16806     | 5L   |
| 16805     | 20L  |



## RAPID DEMULSE 220

High performance, food grade oil which rapidly separates from water and prolongs service life

High performance oil formulated to maximise lubricant and machine lifetime of water cooled homogenisers and similar systems.

- ▶ Rapid water demulsification under conditions of high load and elevated temperature
- ▶ Allows quick water drainage for reduced downtime
- ▶ Good wear protection properties
- ▶ Clean, low odour product
- ▶ Temperature range -5°C to +130°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size |
|-----------|------|
| 15965     | 20L  |
| 15969     | 200L |



## REFRIGERATION Compressor Oil

Non waxing fluid for most types of refrigeration compressors

A low temperature lubricant specifically designed for refrigeration compressor systems.

- ▶ No waxing
- ▶ Clean fluid in operation – suitable for recirculation
- ▶ Compatible with all common refrigerants including ammonia
- ▶ Low carry over into refrigerant, reducing oil consumption
- ▶ Extremely low pour point -45°C.
- ▶ NSF H2 Registered

| Part Code | Size |
|-----------|------|
| 31009     | 200L |



# FOOD GRADE ANTI-SEIZE & ASSEMBLY PRODUCTS



A range of premium, food grade, quality products which protect fasteners against heat and corrosive attack, and ease future dismantling thereby reducing downtime and costs.

## FOODLUBE® Multi-Paste

**Food grade, multi-purpose anti-seize & lubricating paste**

A superior performance, white anti-seize and assembly paste developed for protecting fasteners and lubricating bushes, slides and small open gears.

- ▶ Ideally suited for use on a large range of surface including stainless steel
- ▶ Long life, up to six times more than the competition
- ▶ Exceptionally clean compared to copper based anti-seize
- ▶ For high temperature applications
- ▶ Prevents galling & pick-up on assembly
- ▶ Extremely tenacious – resists water wash out
- ▶ Wide temperature range –30°C to +450°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size |
|-----------|------|
| 15750     | 85g  |
| 15851     | 400g |
| 15753     | 500g |
| 15756     | 5kg  |



## FOODLUBE® Multi-Paste Spray

**Food grade, multi-purpose anti-seize and lubricating spray**

A superior performance, white anti-seize and assembly paste developed for protecting fasteners and lubricating bushes, slides and small open gears in a convenient aerosol spray.

- ▶ Ideally suited for use on a large range of surface including stainless steel
- ▶ Long life, up to six times more than the competition
- ▶ Exceptionally clean compared to copper based anti-seize
- ▶ For high temperature applications
- ▶ Prevents galling & pick-up on assembly
- ▶ Extremely tenacious – resists water wash out
- ▶ Temperature range –30°C to +450°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 15751     | 400ml |



## FOODLUBE® Dismantling Spray

**Highly penetrating food grade release spray**

A fast acting penetrating spray for the fast and effective release of corroded and seized components.

- ▶ Highly efficient penetration
- ▶ Short term corrosion protection for released parts
- ▶ Temperature range –20°C to +110°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 15720     | 300ml |




## SHOCK-RELEASE Spray

**Food grade release and dismantling lubricant with shock freeze action**

A release and dismantling lubricant which rapidly frees fittings, fasteners and mechanical assemblies seized by dirt and corrosion.

- ▶ Freezing action causes micro-cracking for rapid release
- ▶ Advanced synthetic base oils for highly effective dismantling
- ▶ Extremely low odour
- ▶ Reinforced with sub micron PTFE
- ▶ Safe for use on all metals, common plastics and rubbers
- ▶ Shock cooling temperature –40°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 32040     | 400ml |

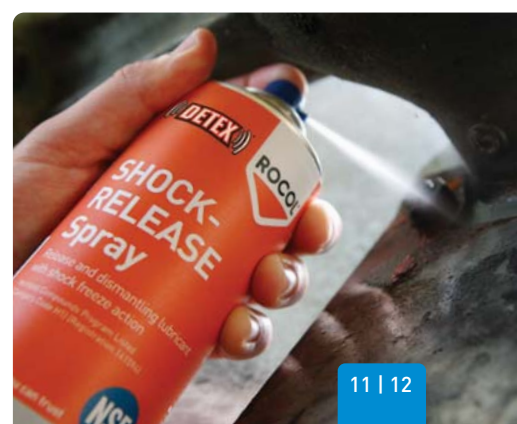



# FOOD GRADE CORROSION PROTECTION / INDUSTRIAL CLEANERS



CORROSION  
PROTECTION



CLEANER



ROCOL food grade corrosion preventatives protect metal components, extending working life and reducing the need for rework and repair.

## Selection Chart

Corrosion Protection

Removable Film

Waxy Film

FOODLUBE® Protect Spray

If you require help in selecting a product, [contact Rocol direct: +44 \(0\) 113 232 2600](mailto:contact@rocol.com)

## FOODLUBE® Protect Spray

**High performance, food grade, long-term corrosion protection**

Effective heavy duty, waxy film for long term corrosion protection for all metal parts.

- ▶ Excellent corrosion protection outdoors for up to 2 years
- ▶ Clean, white visible film
- ▶ Resilient to aggressive cleaning
- ▶ Water displacing for immediate protection
- ▶ Acts as a dry film lubricant - fortified with PTFE
- ▶ Temperature range -40°C to +110°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

**Part Code**  
15020

**Size**  
300ml



## STAINLESS STEEL CLEANER Spray

**Metal surface cleaner and polisher**

Removes greases, oils and general grime from most metal surfaces and is particularly effective on stainless steel.

- ▶ Leaves a clean, smear free, polished surface with no residue
- ▶ Can be used in and around food processing areas
- ▶ Ideal for cleaning and polishing stainless steel
- ▶ Manufactured from only FDA listed ingredients
- ▶ NSF Nonfood Compounds Program listed: Category code A7


**Part Code**  
34161

**Size**  
400ml



A comprehensive range of products designed to meet the essential cleaning requirements of all maintenance jobs.

## Selection Chart

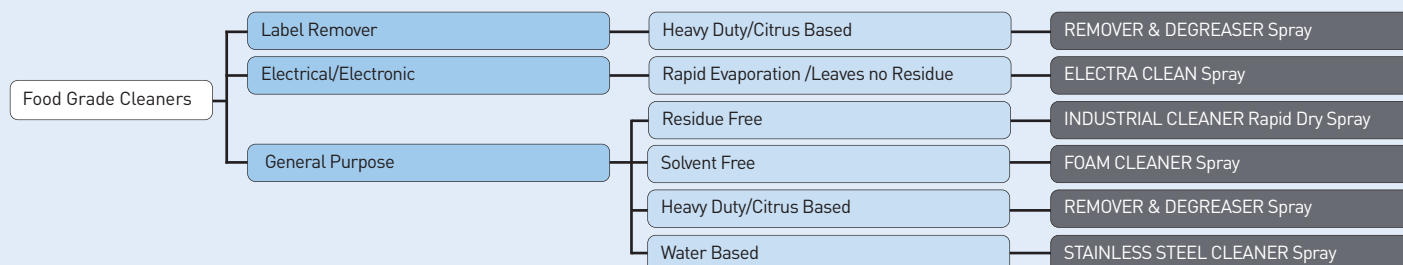

If you require help in selecting a product, [contact ROCOL direct: +44 \(0\) 113 232 2600](tel:+4401132322600)

## FOAM CLEANER Spray

**Powerful, fast acting, aqueous, food safe foaming cleaner**

Universal fast acting foaming cleaner, cuts through grease, dirt and grime.

- ▶ Stainless Steel cleaner
- ▶ Active foaming
- ▶ Ideal for non-porous surfaces
- ▶ Safe for use on most plastics rubbers and painted surfaces
- ▶ Free from solvents
- ▶ NSF A1 Registered

**Part Code**  
34141

**Size**  
400ml



## INDUSTRIAL CLEANER Rapid Dry Spray

**Food grade, solvent based multi-purpose cleaner**

A multi-use, fast drying, powerful solvent cleaner designed to evaporate quickly leaving no residue.

- ▶ A specially formulated blend of degreasing solvents
- ▶ Designed to remove grease, oil and workshop grime from all surfaces
- ▶ Safe on metal, most plastics and paints
- ▶ NSF K1 Registered

**Part Code**  
34131

**Size**  
300ml



## ELECTRA CLEAN Spray

**Food grade, residue free, high performance electrical cleaner**

A powerful, ultra fast drying cleaner designed for use on electrical equipment and components such as switches and switchgear.

- ▶ Rapid evaporation to leave no residue
- ▶ Designed for effective degreasing and cleaning
- ▶ Removes light to medium grease and oil contamination
- ▶ Compatible with most plastics
- ▶ NSF K2 Registered

**Part Code**  
34066

**Size**  
300ml



## REMOVER & DEGREASER Spray

**Heavy duty, citrus based cleaner and label remover**

A heavy duty, multi-purpose citrus degreaser ideal for removing grease, oil, adhesives, labels and general workshop grime.

- ▶ Pleasant characteristic odour
- ▶ Powerful and fast acting
- ▶ Safe on metal, most plastics and painted surfaces
- ▶ NSF C1 Registered

**Part Code**  
34151

**Size**  
300ml



# FOOD GRADE MULTI-PURPOSE MAINTENANCE PRODUCTS




MULTI-PURPOSE  
MAINTENANCE PRODUCTS



The ROCOL range of general purpose food grade maintenance products are designed to be an easy to use and cost effective part of any maintenance program in the food, clean and pharmaceutical industries.

## Selection Chart

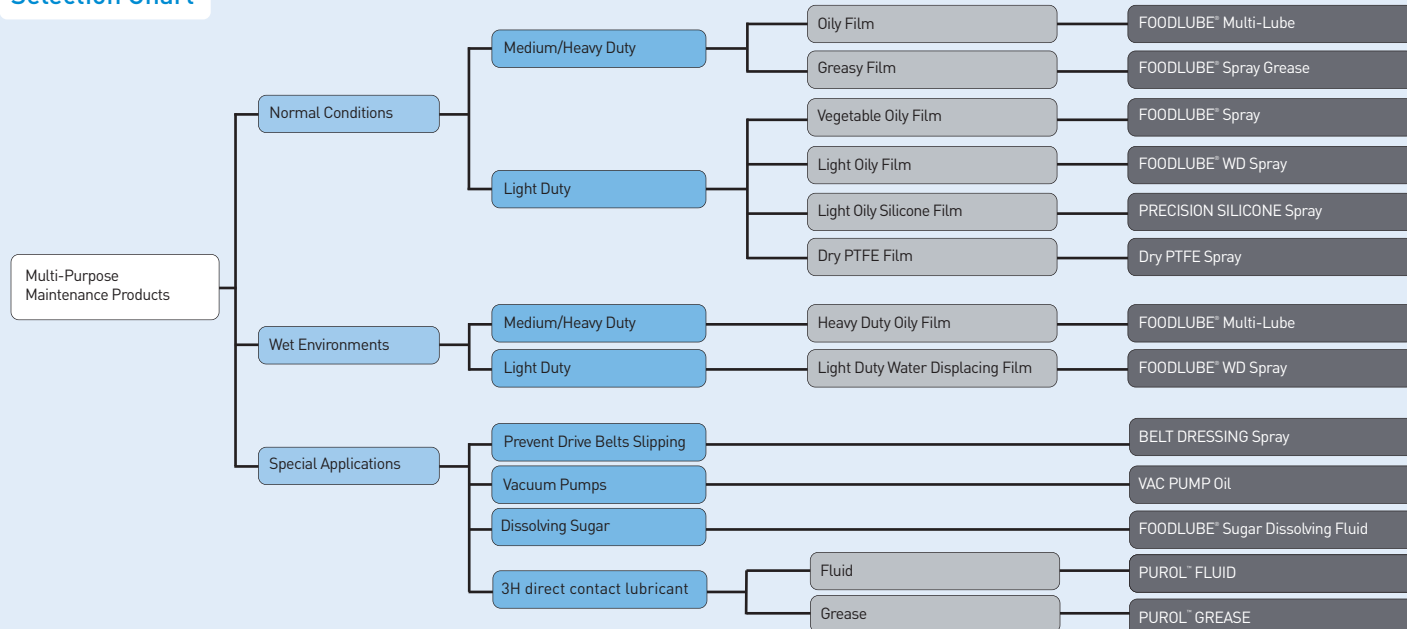

## FOODLUBE® Multi-Lube Fluid

### Food grade, multi-purpose lubricant fortified with PTFE

A fully synthetic, multi-purpose lubricant, fortified with PTFE for effective lubrication particularly on chains, bearings and slides.

- ▶ Clean, non-toxic, thin film aids fast penetration
- ▶ Good load carrying properties
- ▶ Excellent corrosion protection
- ▶ Available as bulk or convenient trigger pack
- ▶ Temperature range -50°C to +180°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 15120     | 500ml |
| 15126     | 5L    |



If you require help in selecting a product,  
contact ROCOL® direct: +44 (0) 113 232 2600

## FOODLUBE® Spray

### High performance, aerosol propelled food grade lubricant

High performance versatile lubricant spray for all-round light lubrication of small bearings, pins, bushes and slides.

- ▶ Long lasting protective film
- ▶ Good corrosion protection
- ▶ Temperature range -20°C to +110°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 15710     | 300ml |



## FOODLUBE® WD Spray

### Food grade water displacing & lubricating spray with PTFE

The No. 1 food safe multi-purpose spray for general use in food, beverage and pharmaceutical plants.

- ▶ Clean, non toxic, water displacing spray
- ▶ PTFE fortified
- ▶ Silicone free formulation
- ▶ Excellent anti-wear and lubricating properties
- ▶ Superior penetrating and cleaning performance
- ▶ Outstanding corrosion protection
- ▶ Temperature range -50°C to +120°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 15010     | 300ml |



# FOOD GRADE MULTI-PURPOSE MAINTENANCE PRODUCTS



## FOODLUBE® Spray Grease

**High performance, multi-purpose, food grade grease**

Multi-purpose extreme pressure spray grease, fortified with PTFE, designed for the enhanced lubrication of all types of slides, bushes, pins and bearings.

- ▶ Significantly extends bearing life
- ▶ Superior load and wear properties
- ▶ Highly resistant to water washout
- ▶ Excellent corrosion protection
- ▶ Wide temperature range -50°C to +160°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 15030     | 400ml |



## DRY PTFE Spray

**Food grade, premium performance, invisible dry film lubricant**

Market leading, low friction, non stick, PTFE lubricant for the dry lubrication of cams, slides, open bearings, chutes and shears.

- ▶ Non staining, friction reducing film
- ▶ High percentage, industry leading PTFE content
- ▶ Approved to Rolls Royce, Naval and NATO Standards
- ▶ Wide temperature range -200°C to +270°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 34235     | 400ml |



## PRECISION SILICONE Spray

**Food grade, high performance, silicone aerosol**

A high performance, colourless non stick lubricating film with wide temperature stability for use on slides, chutes, bearings and conveyors.

- ▶ Extended life and reduced waste due to significantly higher levels of active ingredient
- ▶ Resists oxidation and corrosion
- ▶ Non toxic, clean and colourless
- ▶ Approved to NATO Standards
- ▶ Wide temperature range -50°C to +200°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 34035     | 400ml |



## BELT DRESSING Spray

**Food grade spray to eliminate belt slip and maximise belt life**

The original spray for conditioning and lubricating all types of drive and conveyor belts.

- ▶ Adheres strongly to any belt material
- ▶ Gives instant grip, prevents glazing and reduces slippage
- ▶ Conditions to prevent cracking and breakage
- ▶ Resists build up of grease and dirt
- ▶ Non toxic and colourless
- ▶ Temperature range -50°C to +100°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 34295     | 300ml |



## FOODLUBE® Sugar Dissolving Fluid

**Food grade spray to dissolve and remove sugars and fondants from all surfaces**

Rapidly dissolves all sugars and fondants from all surfaces leaving a light lubricating, protective film.

- ▶ Rapid penetrating action
- ▶ Protects against corrosion
- ▶ Available in bulk and easy to apply trigger spray
- ▶ Temperature range +5°C to +95°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

| Part Code | Size  |
|-----------|-------|
| 15110     | 500ml |
| 15116     | 5l    |





# FOOD GRADE SEAMER FLUIDS / ROTARY COOKER



MULTI-PURPOSE  
MAINTENANCE PRODUCTS



## FOODLUBE® SEAMER FLUID 150

**Food grade, multi-purpose lubricant fortified with PTFE**

A fully synthetic, multi-purpose lubricant, fortified with PTFE for effective lubrication particularly on chains, bearings and slides.

- ▶ Clean, non-toxic, thin film aids fast penetration
- ▶ Good load carrying properties
- ▶ Excellent corrosion protection
- ▶ Available as bulk or convenient trigger pack
- ▶ Temperature range -50°C to +180°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

**Part Code**  
16029

**Size**  
200L



## FOODLUBE® RC 460

**A highly viscous, food grade, multipurpose lubricating fluid**

A high performance, non-toxic lubricant that has been specifically developed as a rotary cooker lubricant and is particularly suited for use in Manzel lubricators often found on this equipment.

- ▶ Offers a wide operating temperature resistance -10°C to +150°C
- ▶ Provides excellent adhesion to metal surfaces reducing fling off
- ▶ Highly resistant to water wash off making it ideal for applications where persistent water contamination, or frequent wash down, occurs
- ▶ Excellent anti-wear properties extending component life and reducing downtime

**Part Code**  
16069

**Size**  
200L



# FOOD GRADE

## PUROL™ 3H LUBRICANTS

### FOR DIRECT FOOD CONTACT



ISO 21469 Certified

MULTI-PURPOSE  
MAINTENANCE PRODUCTS



## PUROL™ GREASE / SPRAY GREASE

**3H direct food contact, multi functional grease**

ISO 21469 Certified multi-purpose grease and food processing release agent for direct food contact.

- ▶ NSF-3H Registered: Release agent for direct contact with food
- ▶ NSF-H1 Registered: Safe for incidental contact with food
- ▶ Does not contain animal derived materials, nut oils or genetically modified ingredients
- ▶ Reduces equipment down-time
- ▶ Increases re-lubrication intervals
- ▶ Excellent temperature resistance (-10°C to +110°C)
- ▶ Easy targeted application by grease gun or manually
- ▶ Excellent technical support and service engineers

| Part Code | Size  |
|-----------|-------|
| 15611     | 370g  |
| 15616     | 4kg   |
| 15631     | 400ml |



## PUROL™ FLUID

**3H direct food contact, multi-functional oil**

PUROL Fluid is a clear, non toxic lubricant designed for the effective lubrication and protection of seals, guides, bearings and blades particularly those operating in food, pharmaceutical and other clean environments where direct food contact is inevitable.

- ▶ NSF-3H Registered-for direct contact with food
- ▶ NSF-H1 Registered-safe for incidental food contact
- ▶ Less risk of contamination
- ▶ ISO 21469 Certified-audit trail peace of mind
- ▶ Excellent wide temperature resistance -10°C to +110°C
- ▶ Good oxidation stability results in extended lubrication intervals
- ▶ For use as a direct food contact release agent and as a lubricant
- ▶ Suitable for protecting knives and surfaces from corrosion

| Part Code | Size  |
|-----------|-------|
| 15617     | 500ml |
| 15618     | 5L    |
| 15619     | 20L   |
| 15620     | 200L  |



## What is Rocolcare?

**ROCOLcare is the premium service package for the food, clean and associated industries that offers the following features and benefits:**

### Increased efficiency

Increases lubricant efficiency, improvements in plant productivity and reduction in costs.

### Risk reduction

Establishes all your lubricant requirements and ensures contamination free lubrication.

### Rationalisation

Rationalises your lubricant usage and reduces your stock holding on site.

### Full audit compliance

ROCOL is the UK's first ISO 21469:2006 certified lubricants manufacturer. ISO 21469 is a globally recognised hygiene certification that ticks an important box for auditors as it provides credible, independent assurance that all Rocol products are formulated, manufactured and supplied hygienically and safely.

### Training

Best practice lubrication training is available.

## ROCOLcare customers:

### Enjoy peace of mind

Assurance that you and the lubrication experts are working together in partnership.

### Achieve operational excellence

Efficiencies are increased through the Rocol preventative and proactive approach to lubrication management.

### Optimise and rationalise

Rationalises your lubricant usage and reduces your stock holding on site.

### Have assurance of full traceability

All Rocol products are developed, manufactured, passed through a stringent QC process and despatched from the Rocol UK manufacturing site.



#### TPM Compatible

- ▶ Rocolcare is modular and can be integrated into your continuous improvement programme







ISO 21469 Certified

**“ROCOLcare is your complete lubrication solution. Our tailored program contains 7 modular elements to give you the best service according to your needs”**



## 1. FOODLUBE® PRODUCTS

A comprehensive range of NSF H1-3H ISO 21469 Certified products ensures audit compliance & gives full traceability



## 4. PLANT MANAGEMENT

A fully stainless steel dispensing equipment to store all your lubricants and the relevant documentation



## 6. TECHNICAL SUPPORT

On & off-site support from a team of chemists and professional engineers plus a 24hr helpline for emergencies



## 2. SURVEY

A bespoke survey of your lubrication requirements matches every single application with the correct lubricant



## 3. LUBRICATION MANAGEMENT

All Rocolcare customers have access to a lubrication management software package



## 5. TRAINING

Certified training helps staff to understand the essential principles of lubrication and how to apply them



## 7. SERVICE ENGINEERING

Highly qualified industry experts, all with SAFE CONTRACTOR certification ensure smooth and efficient operation



# INDUSTRIAL MAINTENANCE PRODUCT SELECTOR

## BEARINGS

| LOW TEMP<br>(-50°C)                                                               |  | MEDIUM TEMP (-30°C - +150°C)                                                      |                                                                                   |                                                                                   |                                                                                    |                                                                                    |                                                                                     | HIGH TEMP (UP TO +235°C)                                                            |                                                                                     |
|-----------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                                   |  | NORMAL SPEED (below )                                                             |                                                                                   |                                                                                   |                                                                                    | HIGH SPEED<br>(up to 3000rpm)                                                      | EXTREME HIGH SPEED<br>(>3000rpm)                                                    | NORMAL CONDITIONS<br>LIGHT/MED LOAD                                                 | HIGH LOAD/<br>VIBRATION                                                             |
|                                                                                   |  | NORMAL CONDITIONS                                                                 | LIGHT/HEAVY LOAD                                                                  | WET                                                                               | HIGH LOAD                                                                          |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|                                                                                   |  |                                                                                   |                                                                                   |                                                                                   | VIBRATION                                                                          |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|                                                                                   |  |                                                                                   |                                                                                   |                                                                                   | LOAD                                                                               |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|  |  |  |  |  |   |  |  |  |  |
| <b>SAPPHIRE LO-TEMP 2</b><br><b>SAPPHIRE PREMIER 2</b>                            |  | <b>SAPPHIRE ADVANCE 2</b>                                                         | <b>SAPPHIRE 2, 1,000</b>                                                          | <b>SAPPHIRE AQUA 2</b>                                                            | <b>SAPPHIRE EXTREME 2</b><br><b>SAPPHIRE HI LOAD 2</b>                             | <b>SAPPHIRE ADVANCE 2</b><br><b>SAPPHIRE PREMIER 2</b>                             | <b>SAPPHIRE HI-SPEED 2</b>                                                          | <b>SAPPHIRE PREMIER 2</b>                                                           | <b>SAPPHIRE EXTREME 2</b>                                                           |
| IDEAL FOR COLD STORES AND REFRIGERATED AREAS<br>FANS & OTHER LOW TEMP BEARINGS    |  | ELECTRIC MOTORS AND FAN BEARINGS                                                  | TRIPLE LIFE BEARING GREASE                                                        | WATER RESISTANT GREASE FOR ALL APPLICATIONS                                       | CRUSHES EXCAVATORS, & HEAVY DUTY EQUIPMENT<br>SLOW MOVING, PLAIN BEARINGS & SLIDES | ELECTRIC MOTORS, FANS & GENERAL APPLICATIONS                                       | ELECTRIC MOTORS, FANS & GENERAL APPLICATIONS                                        | ELECTRIC MOTORS, FANS & GENERAL APPLICATIONS                                        | WATER RESISTANT GREASE FOR ALL APPLICATIONS                                         |

## GENERAL LUBRICATION

| NORMAL CONDITIONS                                                                   |                                                                                     |                                                                                     |                                                                                     |                                                                                     | WET/DAMP ENVIRONMENTS                                                               | DIRTY/DUSTY ENVIRONMENTS                                                            |                                                                                       |                                                                                       | DRIVE BELTS                                                                           | SILICONE GREASE                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| MED/HEAVY DUTY                                                                      |                                                                                     | LIGHT DUTY                                                                          |                                                                                     |                                                                                     | WATER DISPLACING                                                                    | MED / HEAVY LOAD                                                                    |                                                                                       | LIGHT LOAD                                                                            | PREVENT DRIVE BELT SLIPPING                                                           | POTABLE/ DRINKING WATER                                                               |
| OILY FILM                                                                           | GREASY FILM                                                                         | THIN OILY FILM                                                                      | THIN OILY SILICONE FILM                                                             | DRY PTFE FILM                                                                       | THIN OILY FILM                                                                      | FOR IMMEDIATE USE                                                                   | 3 HOURS FOR FULL CURE                                                                 |                                                                                       |                                                                                       |                                                                                       |
|  |  |  |  |  |  |  |  |  |  |  |
| <b>SAPPHIRE PRECISION LUBE</b>                                                      | <b>SAPPHIRE SPRAY GREASE</b>                                                        | <b>WD SPRAY</b>                                                                     | <b>PRECISION SILICONE SPRAY</b>                                                     | <b>DRY PTFE SPRAY</b>                                                               | <b>WD SPRAY</b>                                                                     | <b>DRY MOLY PASTE</b>                                                               | <b>DRY MOLY SPRAY</b>                                                                 | <b>DRY MOLY SPRAY</b>                                                                 | <b>BELT DRESSING SPRAY</b>                                                            | <b>SAPPHIRE AQUA-SIL</b>                                                              |
| LINKS, PINS, PIVOTS, BEARINGS, CHAINS                                               | BEARINGS, LINKS, PINS, SLIDES                                                       | PROTECTS LINKS, PINS, BUSHES                                                        | SLIDES, CHUTES, GENERAL LIGHT LUBRICATION                                           | SLIDES, CHUTES, GENERAL LIGHT LUBRICATION                                           | PROTECTS LINKS, PINS, BUSHES                                                        | BUSHES, SLIDES & CAMS                                                               | BUSHES, SLIDES & CAMS                                                                 | SLIDES, CHUTES, GENERAL LIGHT LUBRICATION                                             | VEE, FLAT & CONVEYOR BELTS. STOPS DRYING OUT AND REDUCES CRACKING AND BREAKING        | O-RINGS SEALS & PLASTICS. STOPS DRYING OUT AND REDUCES CRACKING AND BREAKING          |

## POWER TRANSMISSION

| AIR COMPRESSORS                                                                     |                                                                                     | HYDRAULICS                                                                          | OPEN GEARS                                                                          |                                                                                                                           | GEARBOXES                                                                                          |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| COMPRESSOR OIL                                                                      | AIRLINE LUBRICATORS                                                                 |                                                                                     | NORMAL CONDITIONS                                                                   | SUBMERGED OR WET GEARS                                                                                                    | SPUR/HELICAL GEARBOXES                                                                             | WORM DRIVE GEARBOXES                                                                  |
|  |  |  |  |                                        |               |  |
| <b>SAPPHIRE HI-POWER 68/100</b>                                                     | <b>SAPPHIRE HI-POWER 22</b>                                                         | <b>SAPPHIRE HI-POWER 32/46</b>                                                      | <b>TUFGEAR UNIVERSAL SPRAY</b>                                                      | <b>TUFLUBE ALL WEATHER</b>                                                                                                | <b>SAPPHIRE HI-TORQUE 100/220/320</b>                                                              | <b>SAPPHIRE HI-TORQUE 460/680</b>                                                     |
| SCREW, VANE & RECIPROCATING AIR COMPRESSORS                                         | ALL TYPES OF AIRLINE LUBRICATION BOTTLES                                            | ALL TYPES OF HYDRAULIC POWER PACK                                                   | OPEN GEARS, RACKS PINIONS                                                           | EXPOSED GEARING PENSTOCK, SLIDES & SCREW APPLIED AND STICKS UNDER WATER. SELF REPAIRING. DESIGNED FOR OUTDOOR CRANES ETC. | MEDIUM/HIGH SPEED DRIVE UNITS. BLUE DYE HIGH VISIBILITY TO DETECT LEAKS. EXTENDS THE LIFE OF GEARS | SLOW SPEED WORM DRIVE UNITS                                                           |

# INDUSTRIAL MAINTENANCE PRODUCT SELECTOR

## CORROSION

| REMOVABLE FILM                                                                                                                                                                                                   |                                                                                                                                                                                         | PERMANENT FILM |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
|  <p><b>Z30 SPRAY</b><br/>WAXY FILM WITH 2 YEAR OUTDOOR PROTECTION</p> <p><b>HEAVY DUTY RUST SHIELD</b><br/>CONTAINS RED DYE</p> |  <p><b>COLD GALVANISING RANGE</b><br/>BRIGHT, MATT AND HOT DIP FINISH. OPTIMUM GALVANIC PROTECTION</p> |                |

## CLEANERS

| GENERAL PURPOSE                                                                                                                                                   |                                                                                   |                                                                                                                                                                                                                                                                                                                     | ELECTRICAL                                                                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| WATER WASHABLE                                                                                                                                                    |                                                                                   | RESIDUE FREE                                                                                                                                                                                                                                                                                                        | RESIDUE FREE                                                                                                                                                                                                                                        |
| HEAVY DUTY AEROSOL                                                                                                                                                | BULK                                                                              | LIGHT DUTY                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                     |
|  <p><b>HEAVY DUTY CLEANER/FLUID</b><br/>REMOVES HEAVY GREASE OIL &amp; GRIME</p> |  |  <p><b>FOAM CLEANER SPRAY</b><br/>ANTI-STATIC ALL SURFACE CLEANER</p> <p><b>STAINLESS STEEL CLEANER</b><br/>REMOVES GREASE, OIL &amp; GENERAL GRIME FROM MOST METAL SURFACES AND IS PARTICULARLY EFFECTIVE ON STAINLESS STEEL</p> |  <p><b>INDUSTRIAL CLEANER RAPID DRY SPRAY</b><br/>REMOVES GREASE, OIL &amp; GENERAL DIRT</p> <p><b>ELECTRA CLEAN</b><br/>ELECTRIC MOTORS, RELAYS, SWITCHGEAR</p> |

## ASSEMBLY

| ANTISEIZE/DISMANTLING                                                                                                                                               |                                                                                                                                                                  |                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| COPPER BASED                                                                                                                                                        | MoS <sub>2</sub> BASED                                                                                                                                           | RELEASING SEIZED COMPONENTS                                                                                                                                                                                           |
|  <p><b>ANTISEIZE COMPOUND/SPRAY</b><br/>ALL STATIC FASTENERS &amp; MECHANISMS</p> |  <p><b>DRY MOLY PASTE/SPRAY</b><br/>ALL STATIC FASTENERS &amp; MECHANISMS</p> |  <p><b>PENETRATING SPRAY</b><br/>PENETRATING RELEASES &amp; CLEANS</p> <p><b>SHOCK RELEASE SPRAY</b><br/>FREEZER RELEASE AGENT</p> |

| ASSEMBLY & DRY FILM LUBRICATION                                                                                                                             |                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FOR IMMEDIATE USE                                                                                                                                           | 3 HOURS FOR FULL CURE                                                                                                                                             |
|  <p><b>DRY MOLY PASTE</b><br/>SLIDES, CAMS, BUSHES, PINS &amp; GEARS</p> |  <p><b>DRY MOLY FLUID/SPRAY</b><br/>SLIDES, CAMS, BUSHES, PINS &amp; GEARS</p> |

## DRIVE & CONVEYOR CHAINS

| LOW/TEMP (-30°C TO +120°C)                                                                                                                                                                 |                                                                                                                                                                             |                                                                                                                                                         | HIGH TEMP (100°C TO +280°C)                                                                                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| NORMAL CONDITIONS                                                                                                                                                                          | HIGH LOAD                                                                                                                                                                   | DIRTY/DUSTY ENVIRONMENTS                                                                                                                                | RESIDUE FREE                                                                                                                                             |
|  <p><b>CHAIN &amp; DRIVE FLUID/SPRAY</b><br/>ALL CHAIN TYPES, SPRAY EXCELLENT CORROSION PROTECTION</p> |  <p><b>CHAIN GUARD HI-LOAD</b><br/>ALL HIGH LOAD CHAINS INCLUDING FORK LIFT TRUCKS</p> |  <p><b>DRY MOLY FLUID/SPRAY</b><br/>ALL DRY CHAIN APPLICATIONS</p> |  <p><b>CHAIN GUARD 280</b><br/>ALL HIGH TEMP CHAIN APPLICATIONS</p> |



# SITE SAFETY PRODUCT SELECTOR

## EASYLINE® PERMANENT LINE MARKER

### APPLICATOR



**EASYLINE® Edge Applicator**

APPLICATOR FOR EASYLINE AQUA PAINT, PROVIDES 3 WIDTHS OF LINE: 50, 75 AND 100 MM

### STENCILS



**Large Disabled Stencil**

RANGE OF STENCILS TO ACHIEVE ALL YOUR MARKING TASKS IN YOUR WORK ENVIRONMENT

## ANTI-SLIP SOLUTIONS

### FLOOR COATINGS



**SAFE STEP® 50**

FOR USE IN LARGE AREAS WHERE A LOW PROFILE PEDESTRIAN GRADE ANTI-SLIP COATING IS REQUIRED

### FLOOR COATINGS



**SAFE STEP® 100**

A HIGH PERFORMANCE, SINGLE PACK EPOXY ESTER ANTI-SLIP COATING SUITABLE FOR HEAVY PEDESTRIAN TRAFFIC.

### FLOOR COATINGS



**SAFE STEP® 200**

A HIGH PERFORMANCE, TWO PART EPOXY ANTI-SLIP COATING SUITABLE FOR HEAVY VEHICULAR TRAFFIC.

### FLOOR COATINGS



**SAFE STEP® 500 SF**

EXTRA HEAVY DUTY, TWO PART EPOXY ANTI-SLIP COATING PROVIDING SUPERIOR RESISTANCE TO CHEMICALS AND WEAR.

### FLOOR COATINGS



**SAFE STEP® Anti Slip Spray**

LIGHT ANTI-SLIP COATING IN SPRAY FOR AN APPROXIMATE DURABILITY OF 6 MONTHS DEPENDING ON APPLICATION.

### FLOOR COATINGS



**SAFE STEP® Non Metal Primer**

TWO-PACK FAST DRYING EPOXY PRIMER/SEALER FOR NON METAL SURFACES.


### FLOOR COATINGS



**SAFE STEP® Metal Primer**

TWO-PACK FAST DRYING EPOXY PRIMER FOR METAL SURFACES.

### PANELS, TREADS & STAIR NOSINGS



**SAFE STEP® Matrix™**

HIGHLY RESISTANT RANGE OF PANELS AND TREADS PROVIDING ANTI-SLIP SOLUTION FOR PEDESTRIAN TRAFFIC

### TAPES



**SAFE STEP® Tape 25mm x 18.25m**

LARGE RANGE OF ANTI-SLIP TAPES.

## REPAIR PRODUCTS

### REPAIR



**SAFE STEP® Asphalt Repair Compound**

FAST DRYING ASPHALT REPAIR COMPOUND

### REPAIR



**SAFE STEP® Concrete Repair Compound**

HIGHLY RESISTANT CONCRETE REPAIR COMPOUND FOR INTERNAL AND EXTERNAL USE.

### REPAIR



**SAFE STEP® Heavy Duty Epoxy Repair**

HIGHLY RESISTANT RESIN REPAIR COMPOUND FOR INTERNAL AND EXTERNAL USE.

### TRAFFIC MANAGEMENT



**PACERS®**

HIGH PERFORMANCE SPEED REDUCTION SYSTEM TO 5MPH & 15MPH, SUPPORTS UP TO 44 TONS



# METAL WORKING PRODUCT SELECTOR

## REAMING, TAPPING AND DRILLING LUBRICANTS

|                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>HAND APPLIED METAL CUTTING LUBRICANTS</b></p>  <p><b>RTD® LIQUID</b></p> <p>REAMING, TAPPING AND DRILLING LUBRICANT SPECIFICALLY FORMULATED TO DOUBLE TOOL LIFE</p> | <p><b>HAND APPLIED METAL CUTTING LUBRICANTS</b></p>  <p><b>RTD® CLEANCUT</b></p> <p>NON-STAINING METAL CUTTING LIQUID WHICH DOUBLES TOOL LIFE</p> | <p><b>HAND APPLIED METAL CUTTING LUBRICANTS</b></p>  <p><b>RTD® COMPOUND</b></p> <p>METAL CUTTING COMPOUND SUITABLE FOR THE MOST SEVERE CUTTING OPERATIONS</p> | <p><b>HAND APPLIED METAL CUTTING LUBRICANTS</b></p>  <p><b>RTD® SPRAY</b></p> <p>METAL CUTTING SPRAY IDEAL FOR USE WHERE ACCESSIBILITY IS A PROBLEM</p> | <p><b>HAND APPLIED METAL CUTTING LUBRICANTS</b></p>  <p><b>RTD FOAMCUT SPRAY</b></p> <p>FOAMING LOW ODOUR SPRAY LUBRICANT SUITABLE FOR SEVERE CUTTING OPERATIONS</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## CUTTING FLUID

|                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>VALUE ENGINEERED METALWORKING FLUIDS</b></p>  <p><b>V-cut™ MT</b></p> <p>GENERAL PURPOSE WHITE MILKY FLUID FOR LIGHT/MEDIUM CUTTING OPERATIONS</p> | <p><b>VALUE ENGINEERED METALWORKING FLUIDS</b></p>  <p><b>V-cut™ SS</b></p> <p>GENERAL PURPOSE, GREEN SEMI SYNTHETIC FLUID SUITABLE FOR CUTTING AND GRINDING OPERATIONS</p> | <p><b>VALUE ENGINEERED METALWORKING FLUIDS</b></p>  <p><b>V-cut™ EP</b></p> <p>HEAVY DUTY WHITE MILKY FLUID SUITABLE FOR ALL MATERIALS, PARTICULARLY HARDENED STEELS AND DIFFICULT TO MACHINE ALLOYS</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## SLIDEWAY LUBRICANTS

|                                                                                                                                                                                                                            |                                                                                                                                                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>MACHINE TOOL SLIDEAWAY LUBRICANTS</b></p>  <p><b>ULTRAGLIDE SPRAY</b></p> <p>TOTAL PROTECTION SLIDEAWAY LUBRICANT IN AEROSOL</p> | <p><b>MACHINE TOOL SLIDEAWAY LUBRICANTS</b></p>  <p><b>ULTRAGLIDE X5</b></p> <p>TOTAL PROTECTION SLIDEAWAY LUBRICANT, HIGHLY TENACIOUS, REDUCE WEAR</p> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## WELDING AND FABRICATION

|                                                                                                                                                                                                                        |                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>NON DESTRUCTIVE TESTING DYE PENETRANT SYSTEM</b></p>  <p><b>FLAWFINDER CLEANER</b></p> <p>FAST DRYING, NO RESIDUE CLEANER</p> | <p><b>NON DESTRUCTIVE TESTING DYE PENETRANT SYSTEM</b></p>  <p><b>FLAWFINDER DYE PENETRANT</b></p> <p>PRECISION CRACK DETECTION PENETRANT</p> | <p><b>NON DESTRUCTIVE TESTING DYE PENETRANT SYSTEM</b></p>  <p><b>FLAWFINDER DEVELOPER SPRAY</b></p> <p>PRECISION CRACK DETECTION DEVELOPER</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## MOULD TOOL CORROSION PROTECTIVE

|                                                                                                                                                                                                                              |                                                                                                                                                                                                            |                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>METAL MARKING INKS</b></p>  <p><b>LAYOUT INK SPRAY</b></p> <p>ULTIMATE FAST DRYING METAL MARKING INK AVAILABLE IN WHITE OR BLUE</p> | <p><b>WELD SPATTER RELEASE</b></p>  <p><b>SPATTER RELEASE SPRAY</b></p> <p>ECONOMICAL NON FLAMMABLE SPATTER RELEASE</p> | <p><b>WELD SPATTER RELEASE</b></p>  <p><b>SPATTER RELEASE FLUID - OIL FREE</b></p> <p>PAINTABLE WATER BASED SPATTER RELEASE</p> | <p><b>MOISTURE GUARD/ METAL GUARD</b></p>  <p><b>MOISTURE GUARD GREEN SPRAY</b></p> <p>FLEXIBLE DEWATERING FILM PROTECTING AGAINST CORROSION CAUSED BY MOISTURE OR DAMP ATMOSPHERE, SILICONE FREE</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|





ROCOL® House, Swillington, Leeds LS26 8BS

**T** +44 (0) 113 232 2600

**F** +44 (0) 113 232 2740

**E** [customer-service@rocol.com](mailto:customer-service@rocol.com)

ROCOL® is a trademark of ITW Inc.

[www.rocol.com](http://www.rocol.com)

ROCOL® A division of **ITW** Ltd



INVESTORS  
IN PEOPLE

