


# BF700 da 1 a 5 leve

# BF700 from 1 to 5 levers

## Caratteristiche generali / Technical characteristics




	l/min	GPM
• Portata nominale / Nominal flow	65	17
• Portata limite / Max flow	90	24
	bar	PSI
• Pressione nominale / Nominal pressure	250	3600
• Pressione max sugli utilizzi / Max pressure on ports	320	4700
• Contropressione max allo scarico / Max pressure in tank-line	80	1100

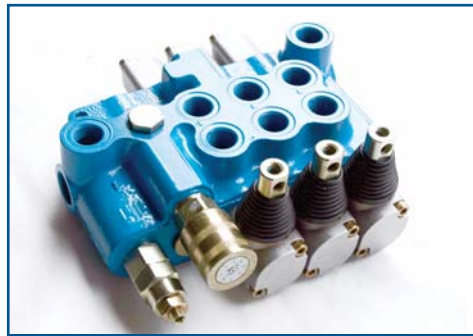


P-T - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

P-A/B - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

A/B-T - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

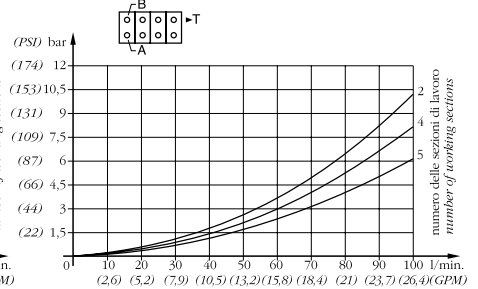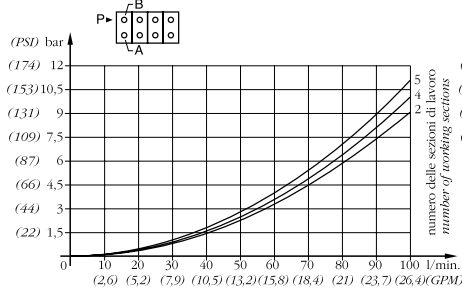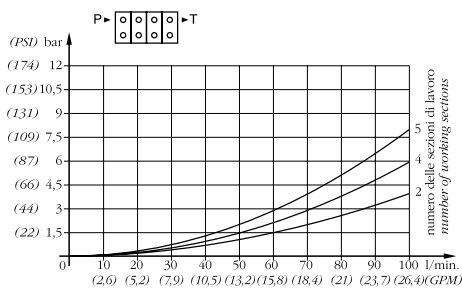

BF701/...=	n° 1 elemento prioritario n° 1 priority element
BF702/...=	n° 2 elementi prioritari n° 2 priority elements
BF703/...=	n° 3 elementi prioritari n° 3 priority elements
BF704/...=	n° 4 elementi prioritari n° 4 priority elements
BF705/...=	n° 5 elementi prioritari n° 5 priority elements

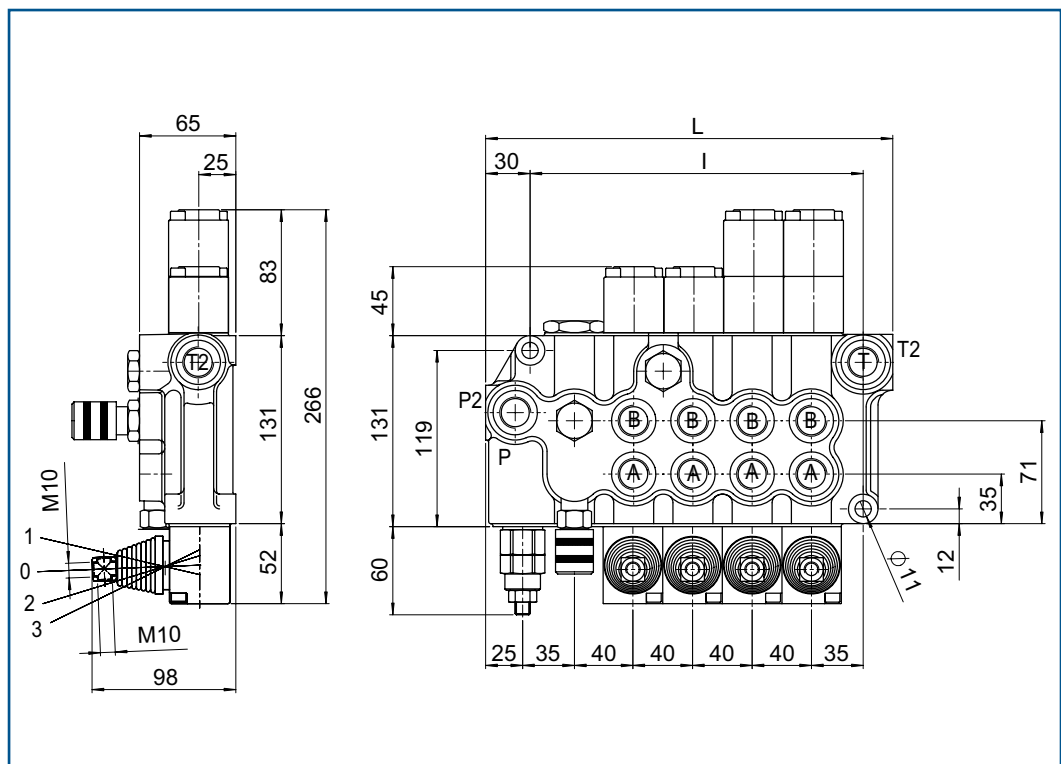

MOD	L	I	Kg
BF70.../1	157	106	6.6
BF70.../2	197	146	9
BF70.../3	237	186	11.2
BF70.../4	277	226	13.5
BF70.../5	317	266	15.7

## FILETTATURA STANDARD - STANDARD THREADS

COD	A-B	P	T	P <sub>2</sub>	T <sub>2</sub>
G	1/2"	1/2"	1/2"	3/4"	3/4"
F	7/8" - 14	7/8" - 14	7/8" - 14	1.1/16" - 12	1.1/16" - 12

◀ Su richiesta filettature diverse  
Other threads available on request

