

Fredriksons Chains

Chains Catalogue

CHAINS



Welcome

The Catalogue contains the Chains catalouge with parts. Separate product overviews in the catalogue presents basic information about the product and order information.

© Copyright

Fredriksons Verkstads AB 2003

The contents of the Chains Catalouge may not be reproduced (even extracts) unless permission is granted. Every care has been taken to ensure the accuracy of the information but no liability can be accepted for any errors or omissions.

The right is reserved to make design modifications.


Fredriksons Chains

Table of Contents

Page nr.:	Products:
01.	Plastic Chain KLDH 50
02.	Plastic Chain F 54
03.	Plastic Chain RT 114
04.	Plastic Chain RTF 114
05.	Plastic Chain FT 70
06.	Plastic Chain FT 40
07.	Metallic chain KLZ 65

Fredriksons Chain *KLDH 50*

Plastic Chain KLDH 50

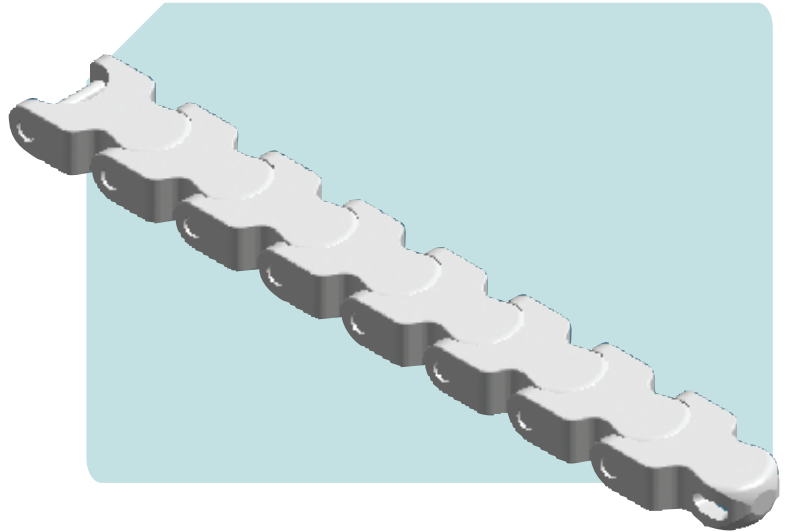

Technical data, link

Material: Low friction ACETAL
Moisture pickup: 0,2 %

Technical data, rivets



Material: Stainless Steel

Technical data, plunge

Material: POLYAMID

Other information:

Recommended max. work load at 20°C 200 kp/2000 N
Weight 1,5 kg/m chain

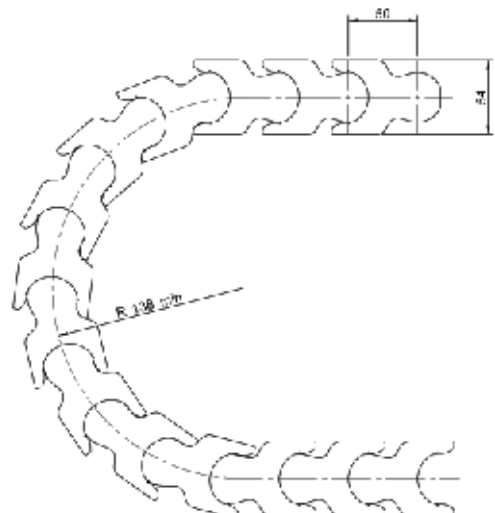


Order information:

- Art no: 12007
- Delivers in carton, 10 m chain/carton.
- Specify number of metres on order.
- Fredriksons Verkstads AB reserve the rights to make technical changes without prior notice.

Art.	Art.nr.
Plastic Chain KLDH50	12007

Fredriksons Chain F 54

Plastic Chain F 54

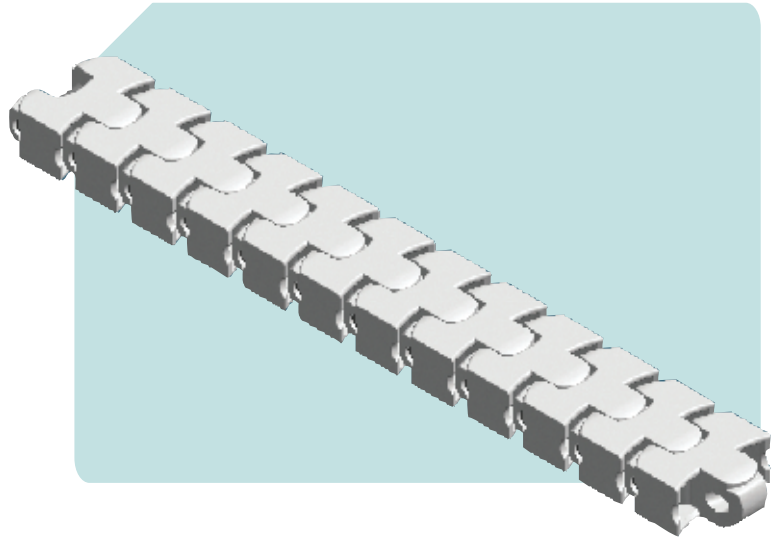

Technical data, link

Material: Low friction ACETAL
 Moisture pickup: 0,2 %

Technical data, rivets


Material: Stainless steel

Other information:


Recommended max. work load at 20°C 200 kp/2000 N
 Weight 1,8 kg/m chain

Order information:

- Art no: F205267-101.
- Delivers in carton, 10 m chain/carton.
- Specify number of metres on order.
- Fredriksons Verkstads AB reserve the rights to make technical changes without prior notice.

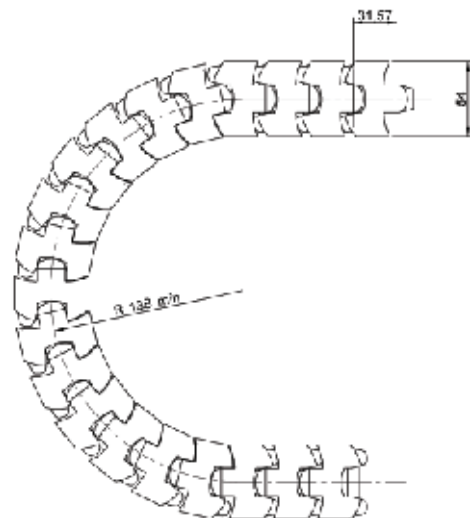


Art.	Art.nr.
Plastic Chain F 54	F205267-101



Fredriksons Chain RT 114

Plastic Chain RT 114

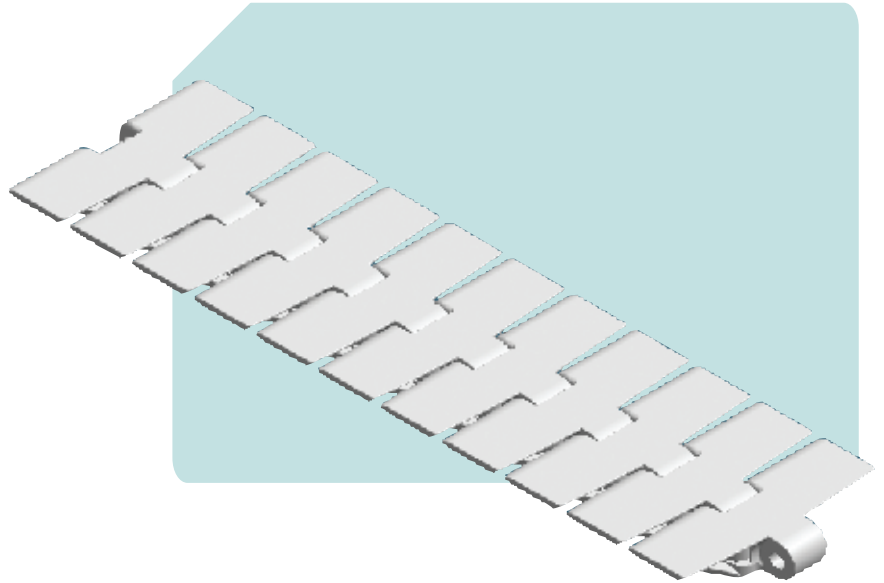

Technical data, chain


Material:	Low friction ACETAL Stainless Steel POLYAMID
Moisture pickup:	0,2 %

Other information:

Recommended max. work load at 20 °C, 200 kp/2000 N
Weight 1,6 kg/m chain.

Order information:

- Art no: F114604-101
- Delivers in carton, 3 m chain/carton.
- Specify number of metres on order.
- Fredriksons Verkstads AB reserve the rights to make technical changes without prior notice.

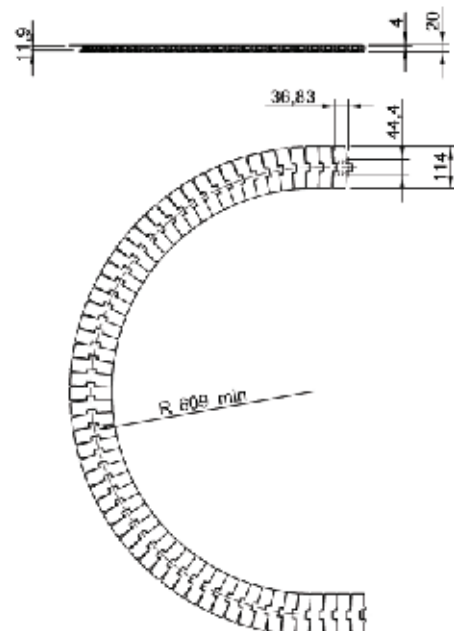

Art.


Art.nr.

Plastic chain RT 114

F114604-101

Fredriksons Chain *RTF 114*

Plastic Chain RTF 114

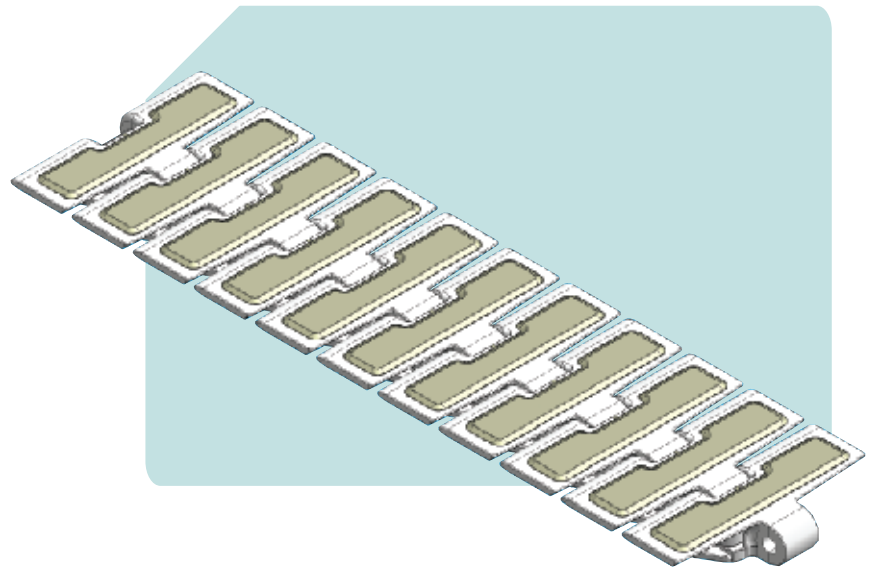

Technical data, chain

Material:	Low friction ACETAL Stainless Steel POLYAMID
Moisture pickup:	0,2 %

Technical data, friction surface


Material:	TPE
-----------	-----

Other information:

Recommended max. work load at 20 °C, 200 kp/2000 N
Weight 1,6 kg/m chain.

Order information:

- Art no: F205728-101
- Delivers in carton, 3 m chain/carton.
- Specify number of metres on order.
- Fredriksons Verkstads AB reserve the rights to make technical changes without prior notice.

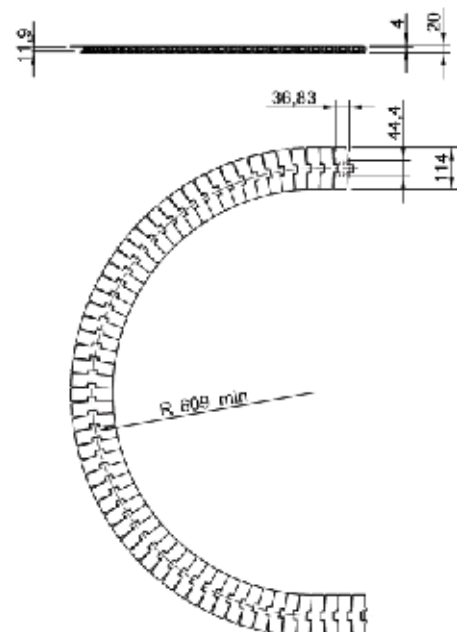

Art.


Plastic Chain RTF 114

Art nr.

F205728-101

Fredriksons Chain FT 70

Plastic Chain FT 70

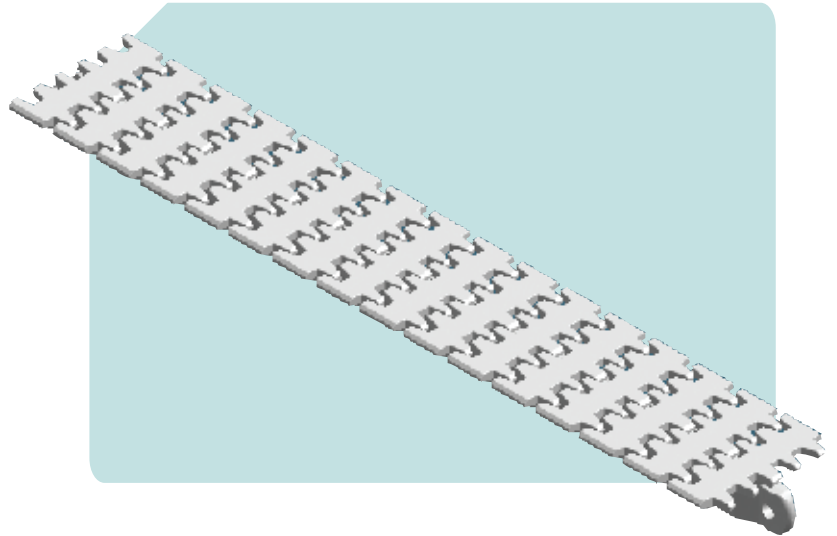

Technical data, link


Material: Low friction ACETAL
 Moisture pickup: 0,2 %

Technical data, rivets

Material: Stainless steel

Other information:

Recommended max. work load at 20°C 100 kp/1000 N
 Weight 0,9 kg/m chain

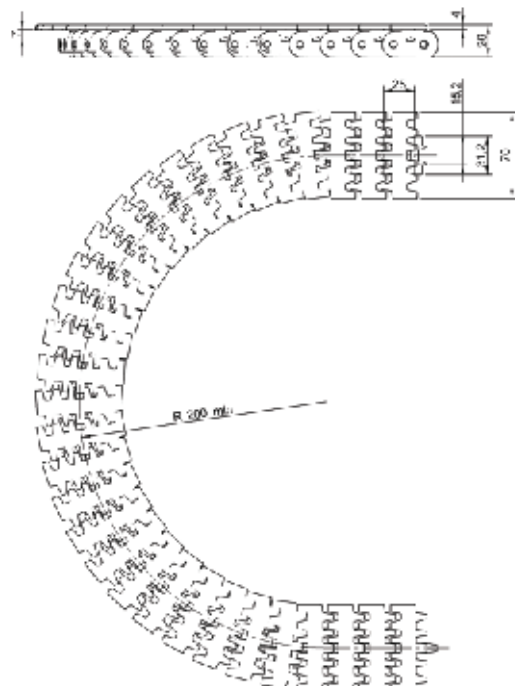


Order information:

- Art no: F205670-101.
- Delivers in carton, 10 m chain/carton.
- Specify number of metres on order.
- Fredriksons Verkstads AB reserve the rights to make technical changes without prior notice.

Art.	Art.nr.
Plastic Chain FT 70	F205670-101

Fredriksons Chain FT 40

Plastic Chain FT 40

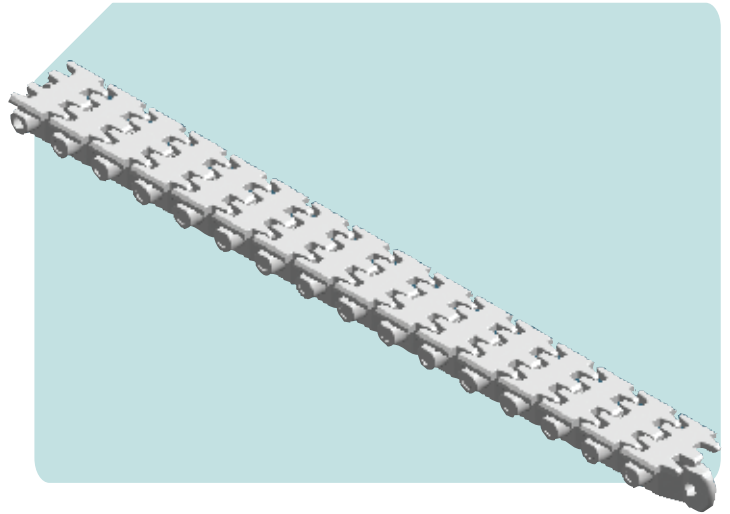

Technical data, link


Material: Low friction ACETAL
Moisture pickup: 0,2 %

Technical data, rivets

Material: Stainless steel

Other information:

Recommended max. work load at 20°C 100 kp/1000 N
Weight 0,8 kg/m chain

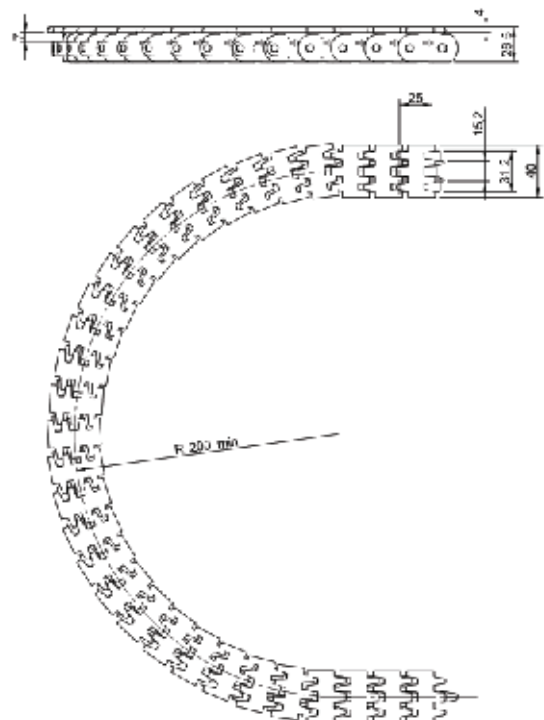

Orderinformation:

- Art nr: F205194-101.
- Delivers in carton, 10 m chain/carton.
- Specify number of metres on order.
- Fredriksons Verkstads AB reserve the rights to make technical changes without prior notice.

Art.



Art.nr.

Plastic Chain FT 40


F205194-101

Fredriksons Chain *KLZ 65*


Metallic Chain KLZ 65

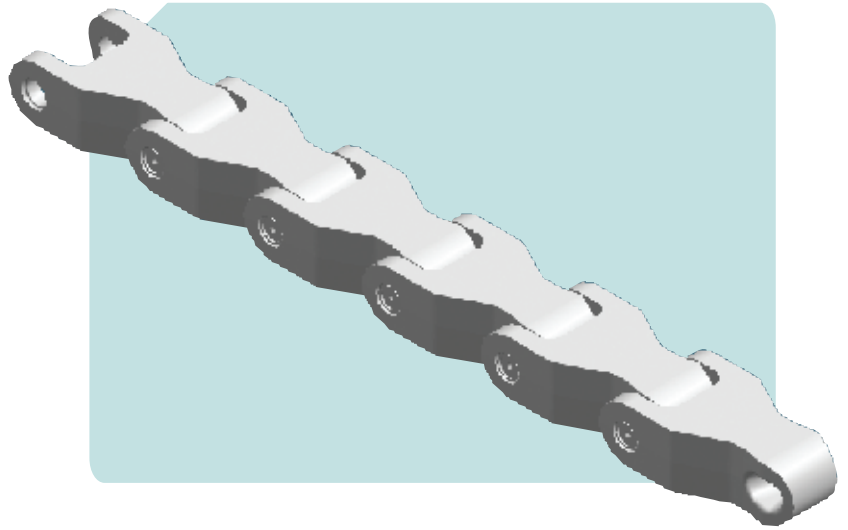

Standard link



Open link



Link with braket for carrier

Technical data, link

Material: Zinc

Technical data, rivet


Material: Stainless steel

Technical data, carrier

Material: Stainless steel
Plunger: D= Ø20 min,
L= 50 max

Other information:

Recommended max. work load at 20°C, 1200 kp/12000 N
Weight 5,5 kg/m chain with standard link.
Weight 4,9 kg/m chain with open link.

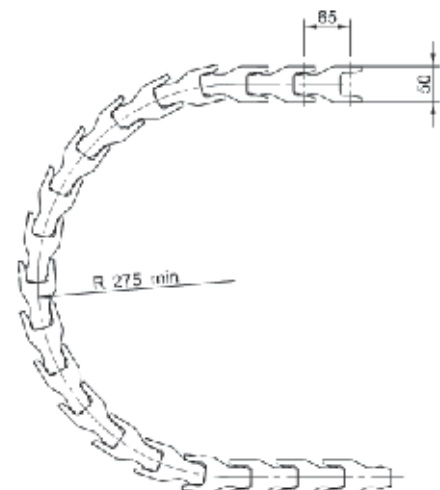

Orderinformation:

- Article no: F 204565-101 with standard link.
- Article no: F 204565-102 with open link.
- Article no: F 204565- with carrier link, specify number/meter and dimension.
- Delivers in carton, 10 m chain/carton.
- Specify number of metrs on order.
- Fredriksons Verkstads AB reserve the rights to make technical changes without prior notice.

Art.	Art.nr.
Chain KLZ 65 standard link	F204565-101
Chain KLZ 65 open link	F204565-102
Chain KLZ 65 with carrier link	F204565-

specify number/meter and dimension.



Fredriksons Verkstads AB • P.O Box 148 • SE-592 23 Vadstena
Phone: +46 143 296 00 • Fax: +46 143 296 09
marknad@fredriksons.se • www.fredriksons.se