



SCP 012-108 DIN is a series of piston pumps with a fixed displacement for demanding mobile hydraulics.

SCP 012-108 DIN covers the entire displacement range 12-108 cm³/rev. at a maximum working pressure of 400 bar. It is a modern, compact pump which meets the market's high demands on flow performance, pressure, efficiency and small installation dimensions.

It is either mounted directly on the power take-off, or on a frame bracket via an intermediate shaft.

Other advantages:

- High maximum speed while maintaining low noise levels
- Smooth operation over the entire speed range
- Long life due to high demands on material selection, such as bearings, seals, etc.
- O-rings on all contact surfaces as well as double shaft seals eliminate oil leakage from the pump and power take-off
- The stop shoulder on the angular housing allows the pump's direction of rotation to be changed without the risk of altering the gear meshing

Pump SCP 012-108 DIN		012	017	025	034	040	047	056	064	084	108		
Theoretical oil flow l/min at pump speed													
	rpm	500	6.3	8.5	12.7	17.1	20.6	23.5	28.0	31.8	41.5	54.0	
		1000	12.6	17.0	25.4	34.2	41.2	47.1	56.0	63.6	83.6	108.0	
		1500	18.9	25.5	38.1	51.3	61.8	70.6	84.0	95.4	125.4	162.0	
Displacement	cm ³ /rev	12.6	17.0	25.4	34.2	41.2	47.1	56.0	63.6	83.6	108.0		
Max pump speed	rpm	2300	2300	2300	2300	1900	1900	1900	1900	1500	1500		
	limited	3000	3000	3000	3000	2500	2500	2500	2500	2000	2000		
Max operating pressure	bar	350	350	350	350	350	350	350	350	350	350		
	intermittent	400	400	400	400	400	400	400	400	400	400		
Weight	kg	8.3	8.3	8.5	8.5	11.7	11.7	11.7	11.7	17.0	17.0		
Dimensions	mm	A	97	97	97	97	113	113	113	113	123	123	
		B	112	112	112	112	130	130	130	130	147	147	
		C	202	202	202	202	228	228	228	228	259	259	
		D	99	99	99	99	109	109	109	109	109	126	126
		E	97	97	97	97	109	109	109	109	109	126	126
		F	89	89	89	89	99	99	99	99	99	115	115
		G	97	97	97	97	106	106	106	106	106	123	123
		H	38	38	38	38	38	38	38	38	38	50	50
			50	50	50	50	50	50	50	50	50	64	64
			ISO G	P	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	1
	ISO G	Q	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	
Tare-weight torque (M)	Nm	6.9	6.9	7.4	7.4	13	13	13	13	21	21		
Direction of rotation		Left (L) and Right (R)											

Intermittent operation refers to a max of 6 seconds per minute.
For more information contact Sunfab.

VERSIONS, MAIN DATA

Example

SC	P	-	084	L	-	N	-	DL4	-	L35	-	S0	S	-	2	00
Line	1		2	3		4		5		6		7	8		0	10

Line	SC	Sunfab Compact
------	----	----------------

1. Type	P	Pump
---------	---	------

2. Displacement	012	017	025	034	040	047	056	064	084	090	108	130
-----------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

3. Direction of rotation	R	Right
	L	Left

4. Sealing	N	Nitril
------------	---	--------

5. Mounting flange	DL4	DIN 4-h (ISO 7653D)
--------------------	-----	---------------------

6. Shaft	L35	DIN 5462 / ISO 14
----------	-----	-------------------

7. Connection cover	S0	40° Sunfab standard
---------------------	----	---------------------


8. Connections	S	Sunfab standard
----------------	---	-----------------

9. Additional	0	-
---------------	---	---

10. Accessories	00	No accessories available
-----------------	----	--------------------------

X = Standard, preferred

Spline shaft:
DIN 5462 / ISO 14
Mounting flange:
ISO 7653-D

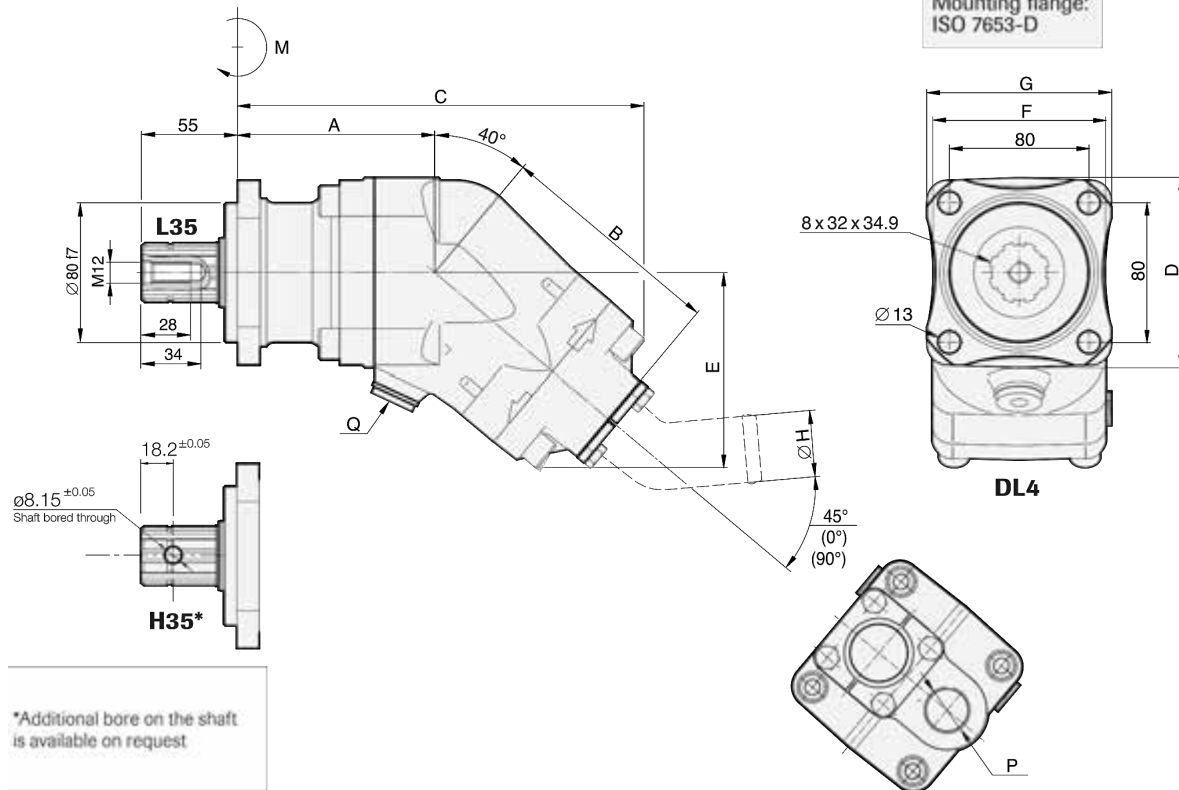



WARNING

When the pump is running:

1. Do not touch the pressure hose
2. Watch out for rotating parts
3. The pump and hoses may be hot

Sunfab reserves the right to make changes in design and dimensions without notice. Printing and typesetting errors reserved.